


W-ZND NAIL ANCHOR

93

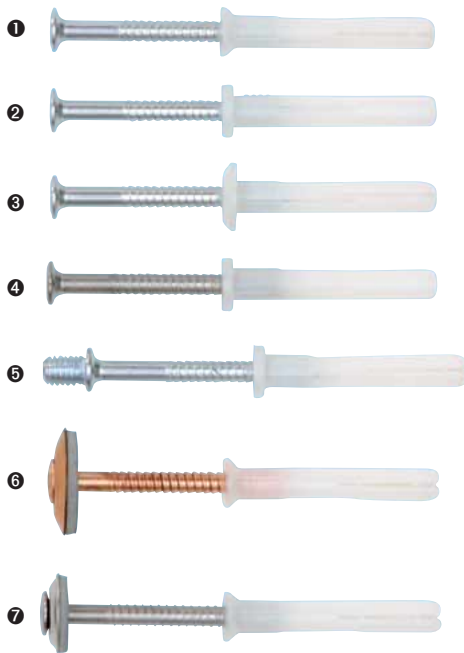

1 Countersunk head (Type SK)

Nail galvanized steel

2 Flat head (Type FK)

Nail galvanized steel

3 Mushroom head (Type PK)

Nail galvanized steel

4 Flat head (Type FK)

Nail A2 stainless-steel, rustproof

5 Connection thread (Type GEW)

Nail galvanized steel

6 Countersunk head (Type DS)

Nail A2 stainless steel/copper-plated;
compl. with Cu tinsmith sealing washer

7 Countersunk head (Type DS)

Nail A2 stainless steel;
compl. with A2 tinsmith sealing washer



Proof of performance

1. Applications

- Can be used in concrete, solid brick, chalky sandstone, aerated concrete, vertically perforated brick, lightweight concrete, perforated sand-lime brick, screed, gypsum planks
- Any attachments in woodworking, metalworking, sanitation and electrical applications for light and medium load range
- Flat head: Securing brackets, panels, plates, cable ducts and all components for non-recessed installation
- Countersunk head: Securing squared timber, laths, thin metal sheets and all components for recessed installation
- Connection thread for screwing on pipe clamps, clamps, holders, etc.
- Type DS with sealing washer: Securing of roof flashing, metal sheets while simultaneously sealing off anchor hole

2. Advantages


- Fast, low-cost installation
- No searching for the matching screw through pre-assembly
- For use in through-bolt mounting
- Can be released again through drive in screw head
- No premature spreading thanks to integrated and defined knock-in lock

3. Properties


- Resistant to UV radiation
- Plastic dowel made of high-quality polyamide, making it resistant to rotting
- Temperature-resistant from - 40 °C to + 150 °C
- For countersinking and leaving protruding
- Countersunk head design countersinks itself automatically in soft wood
- Halogen-free

Setting instructions


Surface: Concrete, solid brick




Drill hole



Clean drill hole



Insert anchor through the component into the drill hole



Knock in expansion nail until flush