


NAIL ANCHORS FOR BASEBOARDS

93.1

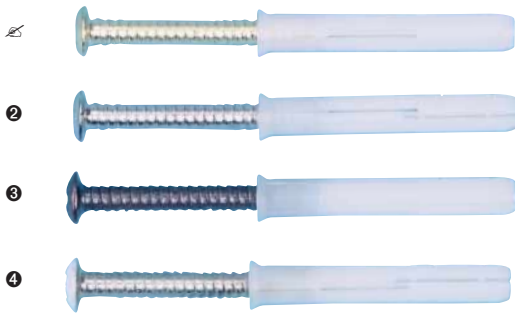

Countersunk head (Type SK)

- ① brass-plated
- ② nickel-plated
- ③ burnished
- ④ head painted white

Proof of performance

1. Applications

- Can be used in concrete, solid brick, sandstone, aerated concrete, vertically perforated brick, lightweight concrete, perforated sand-lime brick, screed, gypsum planks
- Secondary attachments in woodworking, metalworking, sanitation and electrical applications for light loads
- Countersunk head: Securing baseboards, battens, laths, thin plates

2. Advantages

- Fast, low-cost installation
- No searching for the matching screw through pre-assembly
- For use in through-bolt mounting
- Can be released again through drive in screw head

3. Properties

- Resistant to UV radiation
Plastic peg made of high-quality polyamide, making it resistant to rotting
- Temperature-resistant from - 40 °C to + 150 °C


Dimensions in mm	Surface	Drive	Art. No.	P. Qty.
5 x 30	brass-plated	PZ 2	0906 315 301	500
5 x 30	nickel-plated	PZ 2	0906 315 302	500
5 x 30	burnished	PZ 2	0906 315 303	500
5 x 30	head painted white	PZ 2	0906 315 304	500

Can be stored in ORSY® system




Setting instructions


Surface: Concrete, solid brick




Drill hole



Clean drilled hole



Insert anchor through the component into the drilled hole



Knock in expansion nail until flush