


D ANCHOR



dia. d in mm	dia. d2 in mm	l in mm	lg in mm	Drive	Art. No. galvanized, blue passivated	P. Qty.
4.5	8.0	60	26	AW® 25	0233 145 60	200
		70	31		0233 145 70	
		80	36		0233 145 80	
		90	36		0233 145 90	
		100	36		0233 145 100	
		120	42		0233 145 120	
6.0	10.0	60	36	AW® 30	0233 163 60	
		80	36		0233 163 80	
		100	42		0233 163 100	
		120	42		0233 163 120	
		140	42		0233 163 140	
		160	42		0233 163 160	
		180	42		0233 163 180	
		200	42		0233 163 200	
		250	42	0233 163 250	100	

Storable in ORSY®

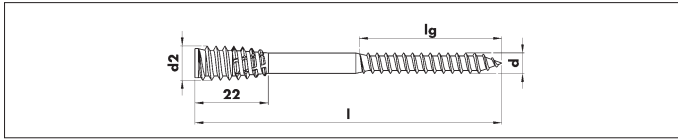

Additional Articles

Master Anchor, dia. 6 mm, Art. No. 0912 806 001,
 dia. 8 mm, Art. No. 0912 808 003
 Multi-Purpose Carbide Drill Bit, dia. 6 mm, Art. No. 0641 06 150,
 dia. 8 mm, Art. No. 0641 08 250
 AW® Cover Caps (AW® 25, AW® 30), dia. 13 mm

Tension-free spacing installation anchor

Material: Galvanized steel, blue passivated

Saves time

- No long-drawn-out compensation by inserting spacing blocks

In system with an AW® anchor cover cap

- Even with angled installation up to 20°, caps lie flat on surface
- Screw has conical transition in lower section of head thread**

- If screw is not guided through hole centered, screw still does not pull lath along (frictionless screwing in).

Installation tip:

Combination of D Anchor with Jamo® screw when installing substructures

- D Anchor has a higher load-bearing capacity and needs not be readjusted.

Applications:

For attaching:

- Window frames (wood, plastic)
- Door jambs (frames)
- Built-in cabinets/kitchen cupboards
- Dry ridge installation
- Substructures on walls, floors and ceilings

Suitable for:

- All concrete and masonry building materials, from solid bricks to hollow bricks to aerated concrete with corresponding anchors. Also for use in wood even without anchors.

Installation Instructions

- 1 Pre-drill in installation element with 8 mm dia.
- 2 Pre-drill in component (wall) with 8 mm dia.
No pre-drilling required in soft wood.
- 3 Push in screw with anchor
- 4 Align and tighten.

AW® Cover Caps

	Wood Colors	RAL Designation	Drive	Art. No.	Drive	Art. No.	P. Qty.
	-	Pure white	AW® 25	0590 425 101	AW® 30	0590 430 101	500
	Pine, spruce	Sand yellow		0590 425 107		0590 430 107	
	Oak, light	Beige brown		0590 425 108		0590 430 108	
	Mahogany	Mahogany brown		0590 425 111		0590 430 111	