

# Ceiling Hooks

## Areas of application

- For the rapid hanging of knotted link chains with a thickness of up to 3.2 mm.
- For the mounting of continuous roof-lights, lamps, lighting rails, etc.


## Material properties

- Ceiling hooks: Galvanised steel.
- Maximum load: 0.5 kN.
- Further data relating to the W-SD M6 impact dowel can be found in the Dowel chapter.



Description	Art. No.	Pack Qty.
Individual ceiling hooks	<b>0862 221 001</b>	100
Insertion tool for impact dowels	<b>0905 700 508</b>	1
Impact dowels W-SD M6	<b>0905 700 400</b>	100

## Insertion and mounting instructions

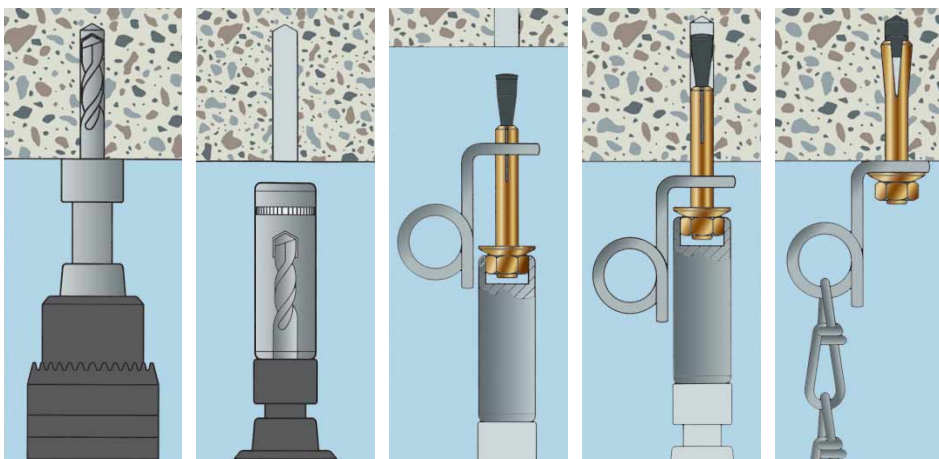

1. Drill hole.
2. Move insertion tool into position.
3. Set up impact dowel and ceiling hook.
4. Use the drill to mount the combined components in the hole.
5. Attach knotted link chain.