


W-DH INSULATION HOLDER

84



Polypropylene

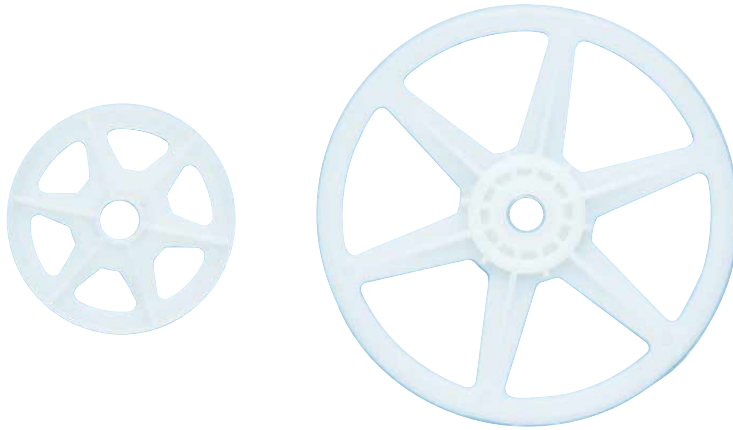

Proof of performance

1. Applications

- Attachment of tarps and foils in construction projects
- Disk dia. 50 mm: for the attachment of hard, self-supporting insulations, e..g. polystyrene
- Disk dia. 90 mm: for the attachment of soft insulations, e..g. mineral wool and fiberglass

2. Advantages


- Quick and easy mounting
- Insulation disk can be joined with a nail anchor
- Insulation disk can be attached directly to wood with a particleboard screw

3. Properties


- High-grade Polypropylene (PP)
- For use in concrete and masonry in conjunction with nail anchor with dia. of 8 mm
- For use in wood in conjunction with a particleboard screw or wood screw with a head dia. of at least 12 mm
- Temperature-resistant from -40° to +100°

Setting instructions


With nail anchor




Drill hole



Insert the anchor through the disk into the drill hole




Knock in expansion nail until flush




Finished


With particleboard screw



Insert screw through disk



Screw in the screw until it is flush



Finished