


Insulated Cable Connector

- Insulation material: PVC.
- Temperature range: -10°C to +75°C.

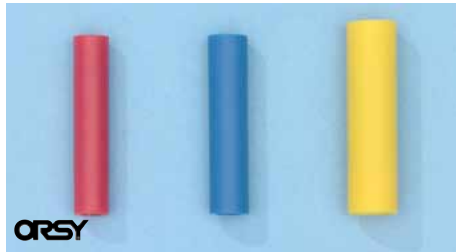

Butt Joiners

Cross-section in mm ²	Length in mm approx.	Art. No.	P. Qty.
0.5 - 1.0	25	0558 925 1	100/300/500
1.5 - 2.5	25	0558 926 2	
4.0 - 6.0	27	0558 927 4	100/300



Ring Lugs

Cross-section in mm ²	Flange hole	Art. No.	P. Qty.
0.5 - 1.0	M 3	0558 900 1	100
	M 4	0558 901 1	100/300
	M 5	0558 902 1	100/500
	M 6	0558 903 1	
	M 8	0558 904 1	100
	M 10	0558 904 11	
1.5 - 2.5	M 3.5	0558 907 2	100/300
	M 4	0558 908 2	
	M 5	0558 909 2	
	M 6	0558 910 2	100/300/500
	M 8	0558 911 2	100
	M 10	0558 912 2	
4.0 - 6.0	M 4	0558 914 4	100/300
	M 5	0558 915 4	
	M 6	0558 916 4	
	M 8	0558 917 4	100
	M 10	0558 918 4	
	M 12	0558 919 4	



Push-On Receptacle

Cross-section in mm ²	Size in mm	Art. No.	P. Qty.
0.5 - 1.0	2.8 x 0.5	0558 960 1	100
	2.8 x 0.8	0558 960	100/300
	4.8 x 0.5	0558 976 1	100/500
	4.8 x 0.8	0558 977 1	100
	6.3 x 0.8	0558 905 1	100/300/1000
	2.8 x 0.8	0558 960 2	
1.5 - 2.5	4.8 x 0.5	0558 976 2	100
	4.8 x 0.8	0558 977 2	
	6.3 x 0.8	0558 905 2	100/300/1000
	8.2 x 0.8	0558 940 2	100
	4.0 - 6.0	6.3 x 0.8	0558 905 4
9.5		0558 941 4	50/300



Fully Insulated Push-On Receptacle

Cross-section in mm ²	Size in mm	Art. No.	P. Qty.
0.5 - 1.0	6.3 x 0.8	0558 905 11	100/300
1.5 - 2.5		0558 905 22	100/300/500
4.0 - 6.0		0558 905 44	100