

Repair Wires

Cable connector, non-insulated with attached wires FLRY


Wire length: 200 mm, Wire color: yellow




Advantages



No crimping pliers required
→ Cost savings.

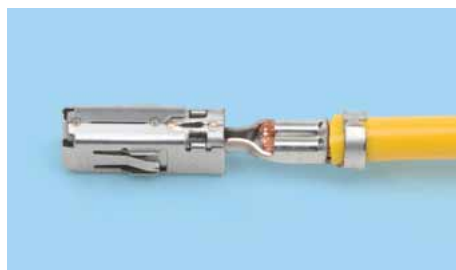

Correct crimping
→ Maximum safety.

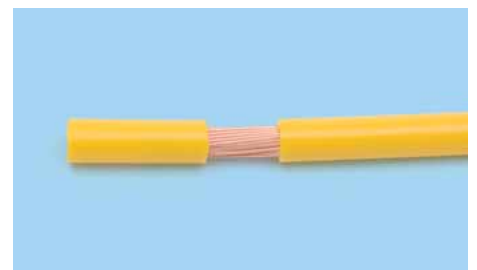

Offset wire ends
→ No stripping required.



Incl. individual wire seals
→ Can be used in conjunction with both sealed and unsealed plug-in housings.



Slide individual wire seal onto end of wire offset by 180°.*



Slide individual wire seal into housing.*

* Attention: Please check whether this type of installation is approved by the respective vehicle manufacturer!

AMP Micro Quadlok System (MQS) 0.63 mm with locking lug

Vehicle manufacturer: Passenger cars: BMW, Mercedes Benz, Fiat, Ford, Opel, Mazda, Porsche, PSA, Renault, VAG, etc.
Commercial vehicles: Fendt, Iveco, Mack, Mercedes Benz, Renault, Scania, Volvo, etc.

Releasing tool: Art. No. 0713 558 201

	Version	Surface	Wire in mm ²	Wire length in mm	VWPart No.	Art. No.	P. Qty.
	Contact	gold-plated	0.5	200	000 979 009A	0558 470 001	10
		tinned			000 979 009	0558 470 002	
	Pin contact	gold-plated			000 979 012A	0558 470 101	
		tinned			000 979 012	0558 470 102	