


# FLRYY Vehicle Cables


- As per DIN/ISO 6722.
- PVC outer sheathing, black.

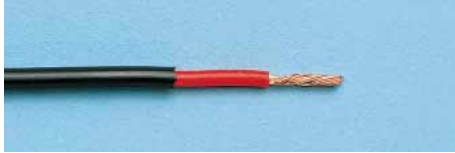

- Nominal voltage:  
 $U_{AC} = 50\text{ V}$ ,  $U_{DC} = 60\text{ V}$ .
- Temperature range:  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$ .
- **Version: single wire, double-insulated**


## ● Version: single wire, double-insulated

Nominal cross-section in mm <sup>2</sup>	ID colors	Outer dia. approx. in mm	Version	Art. No.	P. Qty. /in m
1.5	red	3.6	Spool	<b>0770 201</b>	50
2.5		4.2		<b>0770 204</b>	25

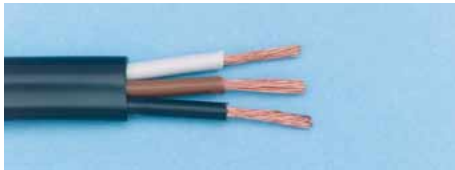

## ● Version: flat cable

Nominal cross-section in mm <sup>2</sup>	ID colors	Outer dia. approx. mm	Version	Art. No.	P. Qty. /in m
2 x 1.5	black, red	3.8 x 6.2	Spool	<b>0770 202</b>	25
2 x 2.5		4.4 x 7.4		<b>0770 203</b>	15
2 x 0.75		3.5 x 5.5	Coil	<b>0770 202 075</b>	100
2 x 1.5	3.8 x 6.2	<b>0770 202 1</b>			
2 x 2.5	4.4 x 7.4	<b>0770 203 1</b>			
3 x 0.75	3.5 x 7.5	<b>0770 203 075</b>			
3 x 1.0	black, white, brown	3.8 x 8.3		<b>0770 203 100</b>	50
3 x 1.5		3.8 x 9.0		<b>0770 205</b>	

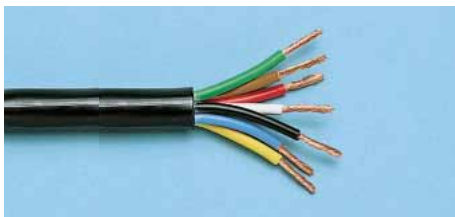

- blk = black
- wht = white
- brn = brown
- yel = yellow
- grn = green
- red = red
- blu = blue
- pur = purple
- gry = gray
- orn = orange

## ● Version: round cable (hose cables)

Nominal cross-section in mm <sup>2</sup>	ID colors	Outer dia. approx. mm	Version	Art. No.	P. Qty. /in m
2 x 0.35	black, white	4.5		<b>0770 127</b>	
2 x 0.5		4.8		<b>0770 126</b>	
2 x 0.75		5.4		<b>0770 121</b>	
2 x 1.0		5.7		<b>0770 122</b>	
2 x 1.5		6.3		<b>0770 120</b>	
3 x 0.75	black, white, brown	5.7	Coil	<b>0770 129</b>	50
3 x 1.0		6.1		<b>0770 128</b>	
3 x 1.5		6.7		<b>0770 116</b>	
4 x 1.5	black, white, brown, yellow	7.3		<b>0770 119</b>	
5 x 1.5	blk, wht, brn, yel, grn	8.1		<b>0770 117</b>	
7 x 1.0	blk, wht, brn, yel, grn, red, blu	8.3		<b>0770 118 0</b>	
7 x 1.5		9.5		<b>0770 118</b>	
8 x 1.5	blk, wht, brn, yel, grn, red, blu, pur	11.0		<b>0770 123</b>	
13 x 1.5	blk, wht, brn, yel, grn, red, blu, pur, gry, orn, red/wht, blu/wht, yel/wht	13.0		<b>0770 124</b>	
6 x 1.5 + 1 x 2.5	1.5 = blk, brn, yel, grn, red, blu 2.5 = wht	10.9		<b>0770 118 1</b>	

# FLRYY 11 Y Hose Cables


## For greater mechanical demand in utility vehicle construction

- As per ISO 4141, Parts 1, 2 and 4 and DIN/ISO 6722-1 to 4.
- For **ADR/GGVS** trailers and semi-trailers.
- TÜV-certified (TÜ.EGG.003-94).
- Fine-wire lead made of bare copper wires, wire separation based on

- PVC, inner sheathing made of special mixture based on PVC.
- Outer sheathing made of a special PUR mixture, color: black.

- UV-resistant and highly oil-, weather- and chemical-resistant.

- Nominal voltage:  
 $U_{AC} = 50\text{ V}$ ,  $U_{DC} = 60\text{ V}$ .
- ❖ Temperature range: Class A,  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

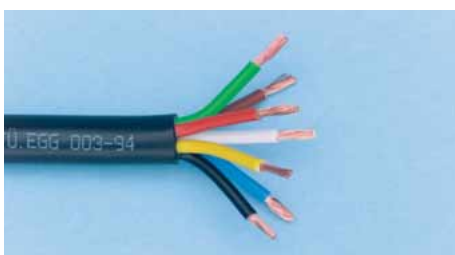

Nominal cross-section in mm <sup>2</sup>	ID colors	Outer dia. approx. mm	Version	Art. No.	P. Qty. /in m
5 x 1.0*	wht, brn, grn, red, gry	7.5	Coil	<b>0770 118 005</b>	50
7-pin 2 x 4.0 + 3 x 1.5 + 1 x (2 x 1.5) with data pair ABS/EBS cable	4.0 = red, brn 1.5 = blk, wht, yel Data pair 1.5 = wht/brn, wht/gry	12.1		<b>0770 118 007</b>	
15-pin 10 x 1.5 + 3 x 2.5 + 1 x (2 x 1.5) with data pair (24 V)	1.5 = blk, brn, yel, grn, red, blu, gry, red, wht/blk, wht/blu 2.5 = wht, orn, wht/red Data pair 1.5 = wht/brn, wht/gry	14.4		<b>0770 118 015</b>	

\*FLRYY type with lead-free PVC outer sheathing (no TÜV or ADR/GGVS approval!).