




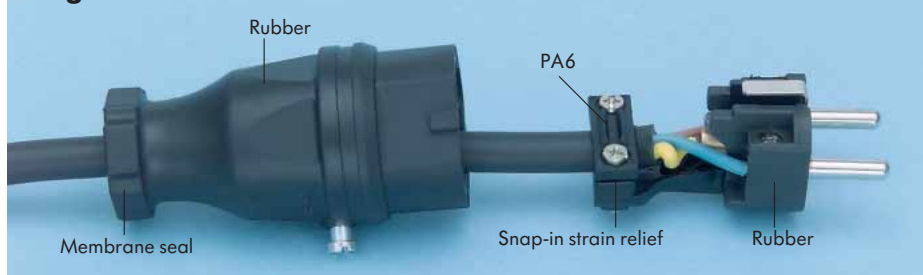
# Solid-Rubber Earthing-Contact Plug and Couplings

**Extremely short mounting times** – **Time/cost benefit.**  
**Robust, solid rubber design** – **Suited for difficult conditions.**

- 16 A, 250 V~.
- For lines up to 3G2.5 mm<sup>2</sup>.
- Large connection compartment.
- Well-accessible strain relief.
- Colour: black.

	Model	Protect. type	Grade	Art. No.	P. Qty.
	Plug	IP44 	<ul style="list-style-type: none"> <li>● Membrane seal.</li> <li>● Snap-in strain relief.</li> <li>● Funnel lead-in of conductors.</li> <li>● Open contact screws.</li> <li>● Open strain relief.</li> </ul>	<b>0969 300 201</b>	1/20
	Clutch	IP20		<b>0969 301 201</b>	1/10
	Clutch with cover	IP44 		<b>0969 301 211</b>	1/10
	Clutch with self-closing spring cover	IP44 		<b>0969 301 221</b>	1/10
	Elbow plug 	IP44 		<b>0969 302 16</b>	1/10
	3-way coupling with self-closing spring covers	IP44 		<ul style="list-style-type: none"> <li>● Separate, well-accessible connection compartment.</li> <li>● Open contact screws.</li> <li>● Open strain relief.</li> </ul>	<b>0969 303 201</b>

## Plug structure



## Additional product

Rubber hose line H07RN-F  
 3G1.5 mm<sup>2</sup>, Art. No. 0770 116 5

