
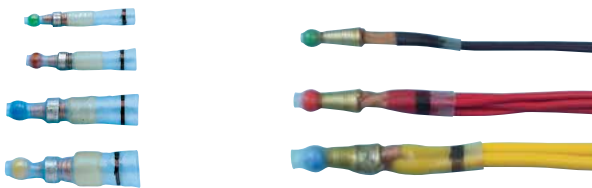


HEAT-SHRINK SOLDER CONNECTOR

- Connecting - soldering - insulating - sealing
→ in a single processing step (time savings).
- Transparent heat-shrink tube
→ visual inspection of the connection is possible.

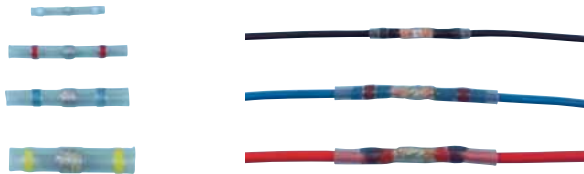

Technical Data	
Temperature range	-55°C to +125°C (butt connector) -40°C to +125°C (end connector)
Shrinking temperature	> 200°C
Dielectric strength	2 kV
Protection type	IP 67

Butt connectors, RoHS-compliant			
Length in mm	Max. bundle dia. in mm	Art. No.	P. Qty.
Approx. 42	2.7	0555 926 1	100
Approx. 42	4.5	0555 926 2	
Approx. 42	6.0	0555 926 3	50

Storable in ® ORSY

Butt connectors, UL-recognized			
Length in mm	Max. bundle dia. in mm	Art. No.	P. Qty.
Approx. 26	1.7	0555 923 0	25/100
Approx. 42	2.7	0555 923 1	
Approx. 42	4.5	0555 923 2	
Approx. 42	6.0	0555 923 3	25/50

Storable in ® ORSY

End connectors, RoHS-compliant, UL-recognized				
Wires in mm ²		Max. bundle dia. in mm	Art. No.	P. Qty.
min.	max.			
0.7	2.4	3.3	0555 924 10	25
2.0	4.0	4.5	0555 924 20	
3.5	8.0	7.0	0555 924 30	
7.5	12.0	9.0	0555 924 40	

Storable in ® ORSY

Special cable connector assortment

Content:

- 3 dimensions of solder butt connectors: red/blue/yellow, 10 pcs. each.
- 3 dimensions of heat-shrink butt connectors: red/blue/yellow, 10 pcs. each.
- 4 dimensions of heat-shrink push-on sleeves/tabs 6.35 x 0.8 mm: red/blue, 10 pcs. each
- 4 ATO push-on fuse holders with cap (watertight), max. load voltage: 32 V, max. load current: 20 A. = 104 pieces.

Art. No. 0964 555 24 P. Qty. 1

Additional Products



Self-igniting Gas Soldering Unit WGLG 100

Art. No. 0984 990 100

P. Qty. 1



Electronic Hot-Air Blower HLG 2300-LCD

Art. No. 0702 203 0 P. Qty. 1

Reflector Nozzle

Art. No. 0702 200 004 P. Qty. 1



Soldering Reflector Nozzle

Art. No. 0702 200 006 P. Qty. 1