


15-Pole Spiral Cables, 24 V

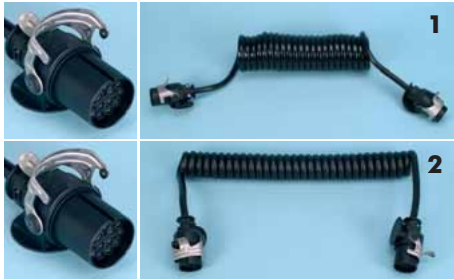

- Connection of socket outlets on pulling vehicle to socket outlets on trailer or semi-trailer.
- ADR approval.
- Tested by German TÜV.
- In accordance with ISO 12098.
- Fabricated complete with plug.
- Wire cross sections: 12 x 1.5 mm², 3 x 2.5 mm².

Fig.	Plug	Spiral diameter		Material	Max. working length	Art. No.	P. Qty.
1	2 x 15-Pole, 24 V	large	approx. 100 mm	Polyamide (PA)	4,500 mm	0510 950 285	1
2	2 x 15-Pole, 24 V	small	approx. 60 mm	Polyurethane (PU)	4,000 mm	0510 950 286	

Practical addition: Parking socket



- Installation dimensions identical to those for ABS, EBS and 15-pole socket outlets.
- For "storing" spiral plugs when one end is not required.

Suitable for	Art. No.	P. Qty.
ABS, EBS, 15-pole and 13-pole plug	0510 950 305	1