


	For screw dia. in mm	L in mm	W in mm	C in mm	S in mm	f in mm	Surface	Art. No.	P. Qty.
	3.5	9.3	8.0	3.9	0.5	1.2 - 1.7	A3A	<b>0500 136 58</b>	100
	3.9	9.2	11.0	4.6	0.5	2.5 - 3.0	A2E	<b>0500 137 04</b>	100
	4.2	15.5	11.0	7.9	0.5	3.0 - 4.0	A3A	<b>0500 117 45</b>	100/300
	4.2	22.0	11.0	7.5	0.5	1.75 - 2.75	A3A	<b>0500 132 51</b>	100
	4.8	22.6	16.0	11.0	0.6	5.0 - 6.0	A3A	<b>0500 135 76</b>	100
	5.5	16.2	14.5	8.0	0.7	3.0 - 4.0	DTB	<b>0500 136 37</b>	100
	5.5	22.3	15	8.3	0.8	0.75 - 1.5	A3A	<b>0500 121 98</b>	100
	6.3	24.8	14.5	10.8	0.7	0.7 - 1.5	A3A	<b>0500 132 04</b>	100
	6.5	25	14.5	10.8	0.8	0.7 - 1.5	A3A	<b>0500 114 03</b>	100

A3A = Zinc, layer thickness 8, matt, colorless/A2E = zinc, layer thickness 5, matt, colorless/DTB = Delta tone, silver

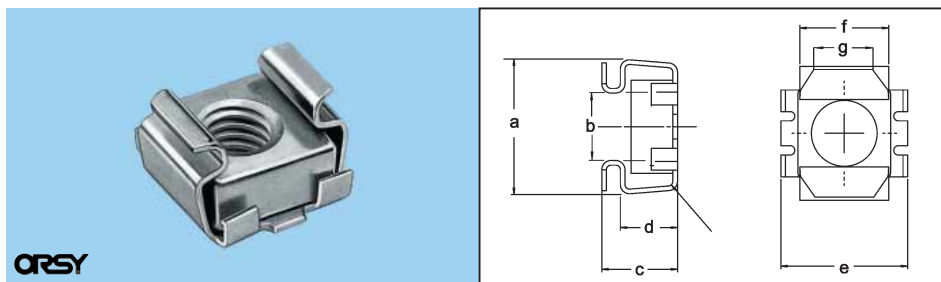


## Box Nuts Without lock

**Galvanized steel, blue passivated (A2K)**

- Serve as inside connection elements for sheet metal structures.
- Efficient mounting by simply pressing in.
- Self-adhesive due to spring-steel nut holder.
- Thanks to the longitudinal and lateral mobility of the nut in the nut holder, fluctuations in the production tolerance are compensated during mounting.
- Can be used even under difficult space or mounting conditions.
- Reusable.

Thr. dia. d	Sheet thckn. in mm	Punched hole in mm	Dim. nut in mm	a in mm	b in mm	c in mm	d in mm	e in mm	f in mm	g in mm	Art. No.	P. Qty.
M 5	0.7-1.6	9.5x9.5	11x11x4.5	13.6-14.2	7.7-8.4	8.5	6.0-6.3	13.0-13.5	9.3	7	<b>0381 5</b>	100
M 6	0.7-1.6	9.5x9.5	11x11x4.5	13.6-14.2	7.7-8.4	8.5	6.0-6.3	13.0-13.5	9.3	7	<b>0381 6</b>	100
M 6	1.7-2.7	9.5x9.5	11x11x4.5	13.6-14.2	7.7-8.4	9.5	6.0-6.3	13.0-13.5	9.3	7	<b>0381 61</b>	100
M 8	1.0-1.7	12.5x12.5	14x14x5.5	17.5-18.4	9.9-10.7	10.5	7.4-7.7	16.4-16.9	11.5	10.6	<b>0381 8</b>	100
M 10	1.0-1.7	12.5x12.5	14x14x5.5	17.5-18.4	9.9-10.7	10.5	7.4-7.7	16.4-16.9	11.5	10.6	<b>0381 10</b>	100

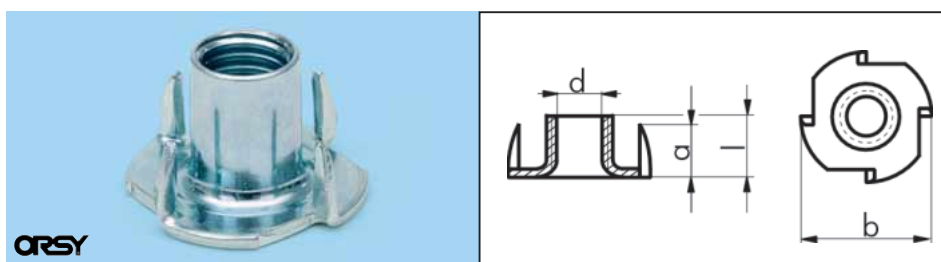

## Knock-In Nuts with knock-in tip

**Galvanized steel, blue passivated (A2K)**

- For installing in wood and wooden materials.
- No protruding connecting parts (e.g. furniture manufacturing).

Thread dia. d	l in mm	a in mm	b in mm	Art. No.	P. Qty.
M 3	5	3.5	13	<b>0376 3 5</b>	100
M 4	8	5.5	15	<b>0376 4 8</b>	100
M 5	12	5.5	17	<b>0376 5 12</b>	100
M 6	9	7.0	19	<b>0376 6 9</b>	100/500
M 6	12	8.5	19	<b>0376 6 12</b>	100/500
M 8	11	7.5	22	<b>0376 8 12</b>	100/500
M 8	15	9.5	22	<b>0376 8 15</b>	500
M 8	17	9.5	22	<b>0376 8 17</b>	100
M 10	16	11.0	25	<b>0376 10 16</b>	50
M 12	14.5	9.5	27	<b>0376 12 14</b>	50

### Fastening

Drill a hole and pound the nut into the screw hole until it lies firmly and smoothly on the wood.