

Technical Data

Operating pressure at room temperature of 20 °C	max. 2.5 bar
Continuous temperature after installation	max. +65 °C (without simultaneous pressurization)
Colour/type	transparent

- Supplied on reel for ORSY 10 dispensing system.

Size ID	OD	Art. No.	Pack Qty./m
4.0	6.0	0895 84	15
4.5	6.5	0895 845 65*	15
5.0	7.4	0895 85	15
6.0	8.4	0895 86	15
7.0	10.0	0895 87	15
8.0	11.0	0895 88	15

- Supplied in coils (not for ORSY 10 dispensing system).

Size ID	OD	Art. No.	Pack Qty./m
10.0	14.0	0895 810	20
12.0	16.0	0895 812	20


* Colour: black

Flexible, Transparent Hoses

- Material: PVC with special interior coating.
→ Resistant against fuel vapours.

Application Range

- Windshield washing fluid containers (water, windshield washing fluid).
- Vert pipes, e.g. on carburetors, etc.
- Fuel vert pipes (but not for fuel lines).

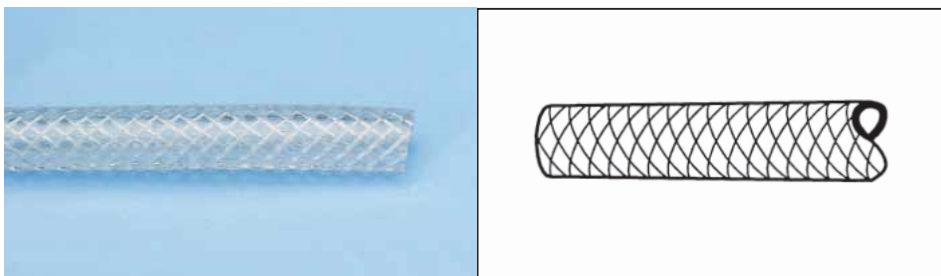

Technical Data


Operating pressure at room temperature	max. 10 bar
Continuous temperature after installation	max. +65 °C

- Material: PVC with braided sleeve.
→ Higher pressure resistance (primarily for headlight systems with high-pressure cleaning systems).

Application Range

- Windshield washer hoses.
- Headlight cleaning systems.
- Supplied on reel for ORSY 10 dispensing system.

Size ID	OD	Art. No.	Pack Qty./m
4.5	8.0	0895 845 80	15

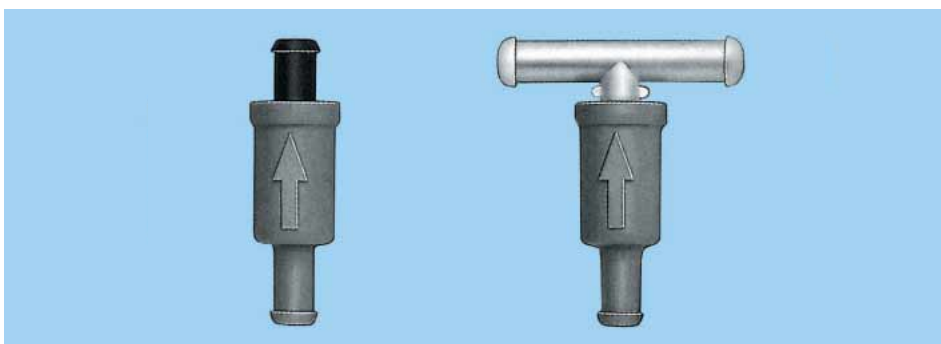

Type	Inner hose Ø mm	Art. No.	Pack Qty.
Straight connector	5	0500 250 58	10
T-connector		0500 250 59	

Non-Return Valve for Windscreen Washer Jets