

ADAPTERS, HOSES AND ACCESSORIES




Adapter for filling leak detection dye

Designation	Art. No.	P. Qty.
For filling the leak detection dye (Art. No. 0892 764 010) via the low-pressure side	0764 000 114	1




Adapter for filling leak stop additive

Designation	Art. No.	P. Qty.
For filling the leak stop additive (Art. No. 0892 764 500) via the high-pressure side	0764 000 118	1

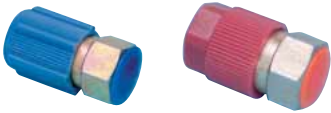

Adapter set 1/4" SAE female thread x service port ND+HD

Designation	Art. No.	P. Qty./pair
Straight screw adapter with 1/4" SAE female thread x service port, high and low pressure	0764 000 134	1

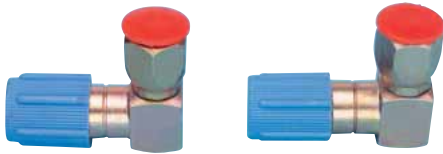

Adapter 90° 1/4" SAE female thread x service port ND

Designation	Art. No.	P. Qty.
Angled screw adapter with 1/4" SAE female thread x service port, low pressure	0764 000 144	2



Adapter 90° 1/4" SAE female thread x service port HD

Designation	Art. No.	P. Qty.
Angled screw adapter with 1/4" SAE female thread x service port, high pressure	0764 000 145	2



Adapter M12 x 1.5 male thread x 1/4" SAE male thread

Designation	Art. No.	P. Qty.
The pressure gauge bridge R-134a can be adapted to the ports of the HFO-1234YF quick-action service couplings by means of the adapter	0764 000 805	2



Filling adaptor

Designation	Art. No.	P. Qty.
Filling adaptor for Leak Stopper Plus (Art. No. 0892 746 775) and other liquid media by using bottles	0764 000 124	1



Application gun for Leak Stopper

Designation	Art. No.	P. Qty.
Application gun for Leak Stopper and leak detection dye in cartridge applications	0891 764 010	1