



# Towbar "Pro"

3.2 t

Approved by the German  
technical supervisory society  
(TÜV)

2-piece

Art. No. 0772 04 400

P. Qty. 1

## Technical data



- Design: 2-piece, galvanised
- Total length: 1.80 m, assembled,  
0.96 m, packed
- Weight: 5.5 kg
- Tensile force: max. 3.2 t
- Pipe diameter: 30 mm
- Locking: Hooks

## Notes

- Test certificate: TÜV-approved, production monitored.  
Tested safety.
- Suitable for towing eyes and trailer couplings.

## Advantages

- Towing capacity up to 3.2 t.
- Absolutely jerk-free towing.
- New joining technique with the help of locking pins.
- No additional parts necessary for mounting/removal.
- Quickly and easily mounted/demounted.
- Warning foil is glued-on on the tow bar.  
→ No need of a flag.
- Practical packaging with velcro on the bottom side.  
→ Slide-proof on carpet materials.

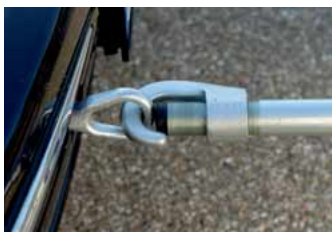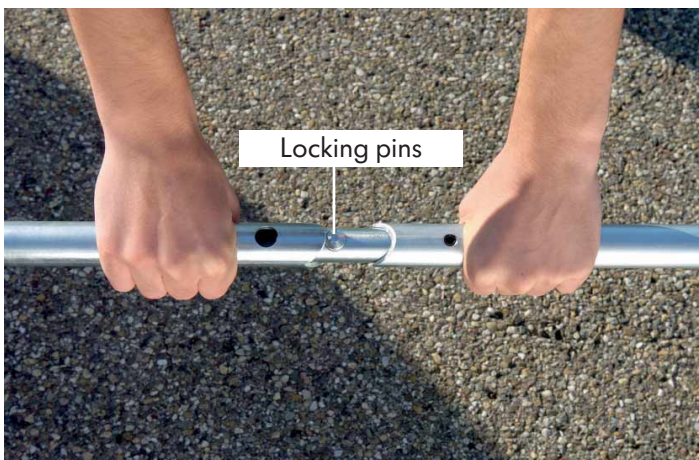

## Operational instructions

- When towing, always release the steering column lock and switch on the warning lights.
- The bar must remain straight between the vehicles, this means if necessary shift laterally when driving, if the eyelets/coupling are not attached to the vehicles centrally.
- The towing of vehicles with defective brakesystem is not allowed in public road transport.
- Do not drive more than max. 50 km/h.
- Always drive in the lane of pulling vehicle.