VAKU 20

Fine filler with high elasticity for closing off existing pores and for repairing small scratches, grooves and uneven areas.

Finely matched filler and resin combinations.
- Non-porous, closed filling.
- Minimal dust development during sanding.

Quick drying.
- Ensures fast, time-saving further processing (sanding, filling and application of top-coat lacquer).

Easy to sand.
- User friendly.
- Simplifies further processing of the object.

Brilliant white pigmentation.
- Optimum surface and preparation for top-coat build-up.
- Excellently suited for use in model and furniture construction.

Maximum permissible VOC content VAKU 20: 250 g/l of product category 2(b).
Max. VOC content
according to ChemVOCFarbV: 2 g/l.

Designation	Color	Content	Art. No.	P. Qty.
VAKU 20	white	970 g + 30 g hardener	**0892 602 01**	1/6
VAKU 20	white	1,960 g + 40 g hardener	**0892 602 02**	1/4
Hardener	red	40 g	**0892 600 004**	1

Use:	
Auto/cargo	For eliminating minor paint damage, scratches and for closing existing pores and uneven areas in the knifing and universal filler area.
Metal	Extremely fine surface processing for an optimum finish.
Wood	Can be used for all types of wood as fine or universal filler. Not suitable for oily types of wood! Do not use on heavily weathered surfaces.

Notes on application:
The surface must be clean, dry and grease-free. Lightly sand surfaces. Only sand polyester material when dry if possible due to sensitivity to water. See separate information on wet sanding.

To exclude possible complaints, always ensure the correct dosing ratio between filler and hardener.

Notes on application:

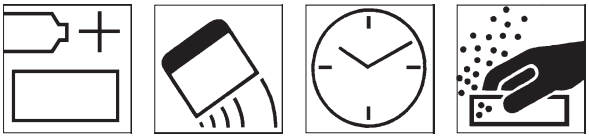

Dosage: 2% hardener | Pot life: 4 – 5 min. at 20°C | Drying time: 20 – 30 min. 20°C | P80 – 280 Wet: only after complete drying

temperature resistant up to 80°C

Hint:
Remove insulation from filler area before final coating with 1-component or 2-component universal primer, HS filler or Rust-Stop Quattro (danger of edge tracing and gloss reduction).

Additional articles:

Useit Abrasive Paper
Art. No. 0581 3..

Rust-Stop Quattro
Art. No. 0893 214 1

Silicone Remover
Art. No. 0893 222 600

Breathing Protection Mask
Art. No. 0899 111

This information is only a recommendation based on our experience. Preliminary testing required!
For further information see the Technical Data Sheet. Subject to change.

MWF - 01/13 - 10986 - ©