


## HOT MELT ADHESIVE 102

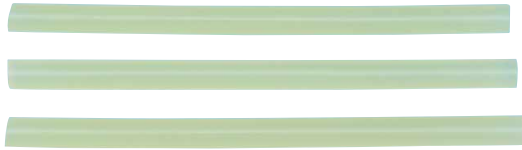

**High-strength hot melt adhesive for effective dent removal on different materials and surfaces.**

- Good thermostability
- Short processing and setting times
- Waterproof and resistant to UV and ageing

### Notice


Heat occurring during storage (e.g. due to solar radiation) must be avoided due to the changes to the outer shape of the hot melt adhesive this can cause.

<b>Art. No.</b>	<b>0890 100 057</b>
<b>P. Qty.</b>	1
<b>Weight of content</b>	500 g
<b>Length</b>	200 mm
<b>Diameter</b>	11.5 mm
<b>Chemical basis</b>	Compound of polymer and natural resin
<b>Colour</b>	Yellow
<b>Min./max. open time</b>	15-40 s
<b>Softening point</b>	100 °C
<b>Min./max. processing temperature</b>	180 to 220 °C
<b>Shelf life from production</b>	24 Month

<b>Related products</b>	<b>Art. No.</b>
Hot glue gun HKP 220	<b>0702 623 1</b>

### Application area

High-strength hot melt adhesive that is ideal for the automotive industry for effective dent removal on different materials and surfaces by affixing pulling tabs.



The usage instructions are recommendations based on the tests we have conducted and are based on our experience; carry out your own tests before each application. We do not assume any liability for a specific application result due to the large number of applications and storage and processing conditions. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee consistent quality of our products. We reserve the right to make technical changes and further develop products.