


PNEUMATIC HOSE REEL



Optional accessories:

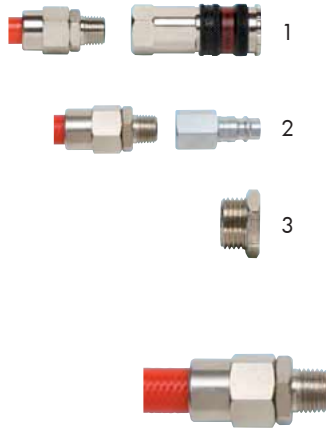

Practical reel winder with high-quality polyurethane hoses in various sizes and lengths.
Order and safety at the workplace.

Not to be used with water or in humid ambient.

DSA 11
Art. No. 0699 008 11

DSA 18
Art. No. 0699 008 18

DSA 17
Art. No. 0699 010 17

Technical data				
Designation		DSA 11 Art. No. 0699 008 11	DSA 18 Art. No. 0699 008 18	DSA 17 Art. No. 0699 010 17
Max. working pressure	in bar	16	16	16
Inside hose diameter	in mm	8	8	9.5
Outside hose diameter	mm	12	12	13.5
Hose length		11 m (9 + 2*)	18 m (16 + 2*)	17 m (15 + 2*)
Supply hose with		2 m (9.5 mm x 13.5 dia.)		
Connections		R 1/4" male thread		
Temperature range		- 20 °C to + 60 °C		
Dimensions	(L x W x H in mm)	400 x 110 x 400	480 x 110 x 480	480 x 110 x 480
Weight	in kg	5.1	7.3	7.3

* Hose length that cannot be rolled up from stopper ball.

Delivery scope			
Reel Winder in Housing	•	•	•
Hose	•	•	•
Adapter with 1/4" male thread		Art. No. 0699 100 980	Art. No. 0699 100 995
Supply hose with male thr. 1/4" adapter from year of manuf. 03/2010, fig. 5		Art. No. 0699 010 171	
Stopper ball	•	•	•
Wall holder	•	•	•
Installation/Operating instructions	•	•	•

Connection or plug-in nipple are not included in the delivery scope. Please include in your order!

Accessories			
Fig.	Designation	Art. No.	P. Qty.
1	Connection with 1/4" female thread	Serie 2000 0699 100 214	1
2	Plug-in nipple with 1/4" female thread	Serie 2000 0699 100 514	
3	Reducing nipple 1/2" MT → 1/4" FT	0699 200 124	
4	Supply hose with male thr. (MT) 1/4" / up to year of manuf. 02/2010	0699 010 171	

Rugged, closed plastic housing.

Hose and winding mechanism are protected against dust and other soiling.

High-quality polyurethane (PUR) hoses.

High resistance to kinking and to oils and solvents with an extremely low weight. Excellent behavior in low and high temperature ranges.

High flow capacity of hoses.

No pressure drop for increased efficiency and lower costs.

Wall, ceiling and floor mounting possible.

For universal use without additional changes.

300-degree swinging mechanism.

High freedom of movement and operating comfort.

Adjustable spring force.

Various speed and balance settings possible.



**FASTER
CLEANER
SAFER**

- Hoses and cables lying on the ground present a considerable source of danger and can result in accidents.
- Eliminate obstacles that can cause tripping at your company and help prevent accidents (accident prevention regulations).
- Hoses which constantly lie on the floor or on a workbench are damaged more easily and must be replaced more often.
- Hose reels prevent this kind of damage, as the hose is always only unrolled for use.