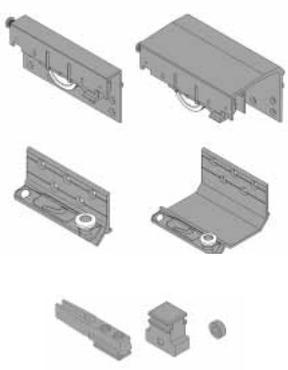




RSB85-HV FURNITURE SLIDING DOOR FITTING


For wooden doors

Available for flush-mounted version

	Designation	Door thickness	Art. No. 2 doors	Art. No. 3 doors	P.
	RSB85-HV Sliding Door Fitting Set Consisting of:	25 mm	0684 525 500	0684 525 501	1
	2x/4x top carriages for inner door, steel, gray coated	30 mm	0684 525 506	0684 525 507	
	2x top carriages for outer door, steel, gray coated	35 mm	0684 525 510	0684 525 511	
	2x/4x bottom guide for inner door, steel, gray coated	40 mm	0684 525 514	0684 525 515	
	2x bottom guide for outer door, steel, gray coated	50 mm	0684 525 520	0684 525 521	
	4x top rail stoppers, plastic 4x bottom rail stoppers, plastic 1x/2x door flight and handle lock, plastic 1x installation instructions				
<p>Note: The running and guide rails and the cover profile are not included in the sliding door fitting set. Please order separately.</p>					

	Designation	Door weight	Art. No.	P.
	Damping system for RSB85-HV, consisting of: 2x damping units	20 - 40 kg	0684 525 551	1
		40 - 85 kg	0684 525 550	

	Designation	Length	Art. No.	P.
	Top double running rail Silver anodized aluminum	2,500 mm	0684 525 532	1
		3,500 mm	0684 525 533	
	Bottom double guide rail Silver anodized aluminum	2,500 mm	0684 525 537	
		3,500 mm	0684 525 538	

	Designation	Door thickness	Length	Art. No.	P.												
 <table border="1" data-bbox="215 1803 399 2049"> <thead> <tr> <th>Door thickness</th> <th>L</th> </tr> </thead> <tbody> <tr><td>25</td><td>91.5</td></tr> <tr><td>30</td><td>96.5</td></tr> <tr><td>35</td><td>101.5</td></tr> <tr><td>40</td><td>106.5</td></tr> <tr><td>50</td><td>116.5</td></tr> </tbody> </table>	Door thickness	L	25	91.5	30	96.5	35	101.5	40	106.5	50	116.5	Cover profile for outer door for dust protection, glued on Silver anodized aluminum	25 mm	1,000 mm	0684 525 503	1
	Door thickness	L															
	25	91.5															
	30	96.5															
	35	101.5															
	40	106.5															
	50	116.5															
	1,500 mm	0684 525 504															
	30 mm	1,000 mm	0684 525 525														
		1,500 mm	0684 525 526														
	35 mm	1,000 mm	0684 525 508														
		1,500 mm	0684 525 509														
40 mm	1,000 mm	0684 525 517															
	1,500 mm	0684 525 518															
50 mm	1,000 mm	0684 525 523															
	1,500 mm	0684 525 524															