

BATHROOM/BUILDING DOOR MORTISE LOCK



Class 3 (whisper lock)

Noise-dampened catch and bolt

Door can be closed quietly

Locking via bar square

Single-turn

Bolt moves 10 mm out of the lock

Closed lock case, galvanized

All dimensions as per DIN 18251-1 with fitting cut-outs

Classification key in accordance with DIN EN 12209: 2003

3	M	5	0	0	G	3	H	G	2	0
---	---	---	---	---	---	---	---	---	---	---

Application


Suitable for folding bathroom/building doors

Scope of delivery

Delivery does not include striking plate

Mandrel dimension (A) in mm	Sleeve width in mm/round	Sleeve surface	Catch and bolt surface	Art. No. DIN R	Art. No. DIN L	P. Qty.
55	20	Limba/Hammer tone	Galvanized/Polyamide	0688 503 710	0688 503 720	1
		Matte stainless steel		0688 503 715	0688 503 725	
		Silver metallic		0688 503 719	0688 503 729	
60		Matte stainless steel		0688 503 735	0688 503 745	
		Silver metallic		0688 503 739	0688 503 749	
		65		Matte stainless steel	0688 503 755	
Silver metallic	0688 503 759			0688 503 769		

Technical information:

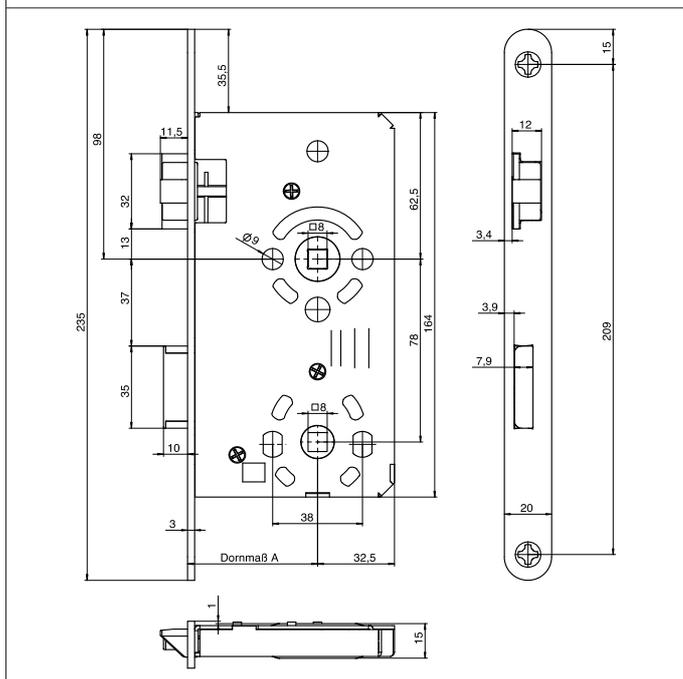

- Galvanized steel clamping nut with polyamide bearing inserts
- Sleeve material: steel, stainless steel
- Catch and bolt: galvanized steel with thermally fixed guide made of polyamide for noise dampening

Designation	Pin dimension (A) 55 mm	Pin dimension (A) 60 mm	Pin dimension (A) 65 mm
Latch nut	8	8	8
Bolt square	8	8	8
Distance in mm	78	78	78
Lock case dimensions in mm	165 x 84.5 x 15	165 x 89.5 x 15	165 x 94.5 x 15
Sleeve, round in mm	235 x 20 x 3	235 x 20 x 3	235 x 20 x 3

Additional articles:

- ! Striking plates
- ? Room door handles
- ? Room door hinges