

# BUILDING DOOR MORTISE LOCK



## Class 3 (whisper lock)

The installation of a die-cast zinc warded-lock insert enables this lock to be used in room doors

### Noise-dampened catch and bolt

Door can be closed quietly

### Profile cylinder perforation with pull-back function

### Double-turn

Bolt moves 20 mm out of the lock. High degree of security.

### Closed lock case, galvanized

### All dimensions as per DIN 18251-1 with fitting cut-outs

Classification key in accordance with DIN EN 12209: 2003


3	M	5	0	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

### Application

Suitable for folding corridor doors, apartment entrance doors and building doors

Mandrel dimension (A) in mm	Sleeve width in mm/round	Sleeve surface	Catch and bolt surface	Art. No. DIN R	Art. No. DIN L	P. Qty.
55	18	Limba/Hammer tone	Galvanized/Polyamide	<b>0688 503 770</b>	<b>0688 503 780</b>	1
		Limba/Hammer tone		<b>0688 503 790</b>	<b>0688 503 800</b>	
		Matte stainless steel		<b>0688 503 795</b>	<b>0688 503 805</b>	
		Silver metallic		<b>0688 503 799</b>	<b>0688 503 809</b>	
60	20	Matte stainless steel		<b>0688 503 815</b>	<b>0688 503 865</b>	
		Silver metallic		<b>0688 503 819</b>	<b>0688 503 869</b>	
		Matte stainless steel		<b>0688 503 875</b>	<b>0688 503 885</b>	
65		Silver metallic		<b>0688 503 879</b>	<b>0688 503 889</b>	

### Technical information:

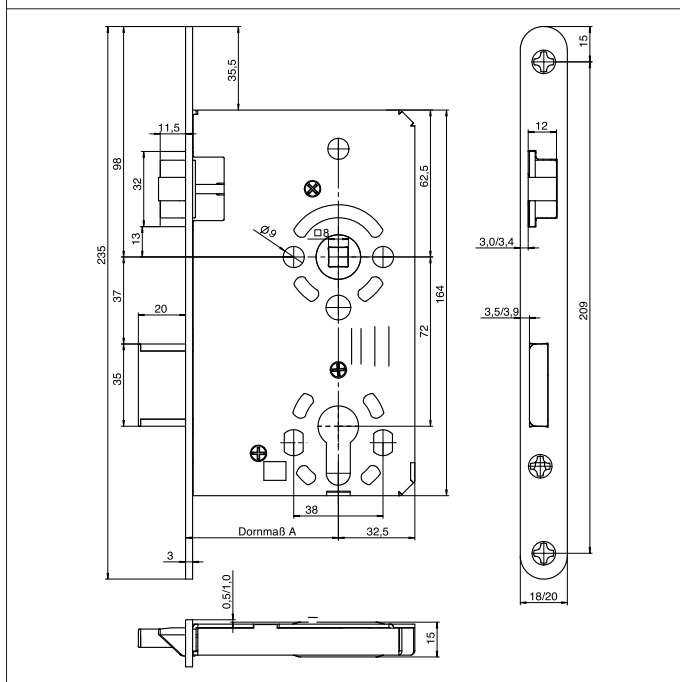

- Galvanized steel clamping nut with polyamide bearing inserts
- Sleeve material: steel, stainless steel
- Catch and bolt: galvanized steel with thermally fixed guide made of polyamide for noise dampening

Designation	Pin dimension (A)	Pin dimension (A)	Pin dimension (A)
	55 mm	60 mm	65 mm
Latch nut	8	8	8
Distance in mm	72	72	72
Lock case dimensions in mm	165 x 84.5 x 15	165 x 89.5 x 15	165 x 94.5 x 15
Sleeve, round in mm	235 x 18 x 3 235 x 20 x 3	235 x 20 x 3	235 x 20 x 3

### Additional articles:

- Striking plates
- Warded-lock insert
- Room door handles
- Room door hinges