

DOOR HANDLE ZD 45



- **Material: die-cast zinc**
- Handle on spring bearing on rosette
Ensures that the handle returns to the horizontal position after being pressed
- Continuous fastening
- For door thicknesses from 38 to 42 mm
- For private living area, e.g. room, bath and apartment entrance door


Surface: matt nickel-plated		
Designation	Art. No.	P. Qty.
Rosette set with KH perforation	0687 171 530	1
Rosette set WC/Bathroom with locking olive	0687 171 531	
Rosette set with PC perforation	0687 171 532	
Rosette changing set for DIN L doors with PC perforation	0687 171 533	
Rosette changing set for DIN L doors with PC perforation	0687 171 534	

1 P. Qty. = 1 complete set

Assembly instructions and assembly accessories: (Square handle pin ■ 8 mm, 3 mm offset screwdriver, special screws with small head, M 5 x 52 mm, galv., and grub screw, DIN 914, M6 x 6 mm, included.

Installation tip:

Winding a soft adhesive tape around the screwdriver enables damage to the surface of the handle to be prevented during assembly.

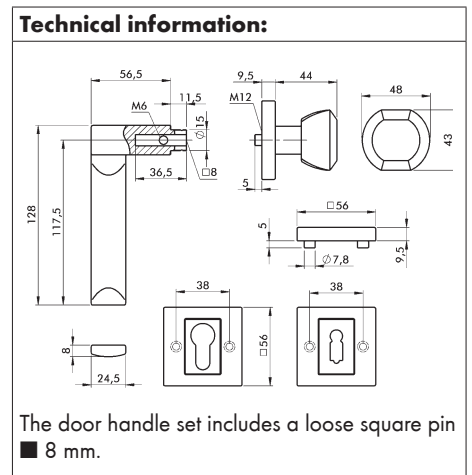

Additional articles:

- ? Basic Drilling Gauge Body, Art. No. 0688 191 300
- KH/PC Drilling Gauge Set, Art. No. 0688 191 312
- WC Drilling Gauge Set, Art. No. 0688 191 317
- Room door hinges
- Ventilation grids
- Door stoppers