


SANDING BELTS FOR TUBE BELT SANDER

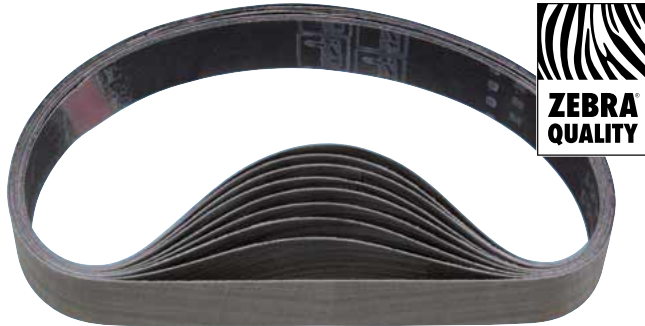

Abrasives: Aluminum oxide
 Color: Gray
 Bonding: All-synthetic resin
 Backing: Semi-flexible X-base
 Scattering: Micro-replication
 Connection: Red film
 Granularity: P120 - P600



Illustration of three-dimensional pyramid structure

Trizact Fabric Sanding Belts® *

Application:

Sanding and polishing (finish sanding) and removing rolling skin.

Design: Aluminum oxide

Semi-flexible X-backing

Your advantage: High adaptability

→ Uniform surface quality on profiled surfaces

Uniform grain structure in three-dimensional pyramid structure

Your advantages: Aggressive grinding, low roughness, considerably longer life, extremely fine sanding pattern.

Sanding-active additives

Your advantage: Low sanding temperature

→ Very cool grinding, no material discoloration.

Materials to be machined:

Stainless steel, rust, acid and heat-resistant steel (high-alloyed), steel and non-ferrous metals.

* Brand name of 3M

Dimensions in mm	Granularity/ Version					P. Qty.	Suitable for Machine
	120 (A160) Art. No.	220 (A100) Art. No.	280 (A65) Art. No.	400 (A45) Art. No.	600 (A30) Art. No.		
20 x 760	0673 500 012	0673 500 022	0673 500 028	0673 500 040	0673 500 060	10	FLEX LRP 1503 VRA
20 x 820	0673 501 012	0673 501 022	0673 501 028	0673 501 040	0673 501 060	10	FEIN RS 12-70
30 x 533	0673 502 012	0673 502 022	0673 502 028	0673 502 040	0673 502 060	10	RÜGGEBERG UBS 5/70 Si-R SUHNER UTC 7-R
30 x 610	0673 503 012	0673 503 022	0673 503 028	0673 503 040	0673 503 060	10	RÜGGEBERG UBS 11/90 Si-R SUHNER UTG 9-R
40 x 618	0673 504 012	0673 504 022	0673 504 028	0673 504 040	0673 504 060	10	FLEX LBR 1506 VRA
40 x 675	0673 505 012	0673 505 022	0673 505 028	0673 505 040	0673 505 060	10	CIBO FiniTube
40 x 760	0673 506 012	0673 506 022	0673 506 028	0673 506 040	0673 506 060	10	FLEX LRP 1503 VRA
40 x 820	0673 507 012	0673 507 022	0673 507 028	0673 507 040	0673 507 060	10	FEIN RS 12-70 POLY-ROMY/1
35 x 650	0673 508 012	0673 508 022	0673 508 028	0673 508 040	0673 508 060	10	Würth RBS 650



Reclosable fleece belts with velour backing and Velcro closure

Applications:

Matting, burnishing, polishing and for matching transitions. Cleaning oxide coatings and removing tempering color.

Materials to be machined:

Forged steel, malleable cast iron, gray cast iron, carbon steel, deep-drawn steel, steel band, injection-molded zinc, non-ferrous metals, Cr-Ni and other stainless steels, as well as wood.

Dimensions in mm	Granularity/Design/Color	P. Qty.
	180/medium/yellow Art. No.	
40 x 600	0585 40 180	5