


Accessories Two-Hand Angle Grinder

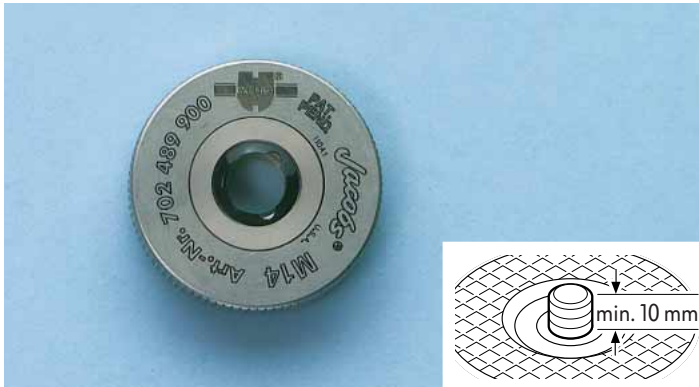


Quick-Action Chuck

Art. No. 0702 489 900

Is attached and taken off manually.
For angle grinder 180 and 230 mm with spindle thread M14.

Caution!

After mounting the clamping flange and the cutting wheel or roughing disc the free length of the grinder must be at least 10 mm.

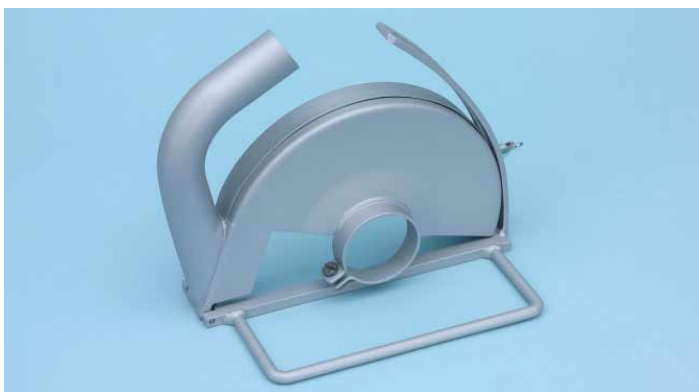

Exhaust-Hood

for EWS 230(-S)

Art. No. 0702 489 902

- Max. cutting depth 42 mm with \varnothing 180 mm, 68 mm with \varnothing 230 mm.
- Sturdy steel sheet metal construction.
- Painted (hammer tone finish).
- For all sorts of slotting and cutting work in stone, brickwork, and concrete.
- Quick depth adjustment by means of wing screw.
- We recommend master industrial vacuum cleaner and universal connection piece Art. No. 0702 400 247.



Face Spanner

straight, for angle grinder 180 and 230 mm

Art. No. 0702 489 904

- For tightening up the clamping nut with flat cutting-off wheels and roughing discs.

cranked, for angle grinder 180 and 230 mm

Art. No. 0702 489 905

- For tightening up the clamping nut with off-set discs, for example lamellar abrasive flap wheels.



Hand Protection

Art. No. 0702 489 906

- Protects the hand of the user when using brushes of any kind, for inst. pot or circular brushes.
- Can be fitted with the handle on right, on left, or at the top.

Diamant Cutting-off Wheels	Art. No. 0666 1... / 0668 1...
Cutting-off Wheels and Roughing Discs	Art. No. 0669 0... / 0670 0...
Lamellar Abrasive Flap Wheels	Art. No. 0578 ... / 0579 ...
Vulcanised Fibre Discs	Art. No. 0580 180 ...
Backing Disc for Vulcanised Fibre Discs	Art. No. 0586 580 180
Braided Pot Brush and Circular Brushes	Art. No. 0714 69...