


# ASSY® BELTED SCREWS



**ASSY®**

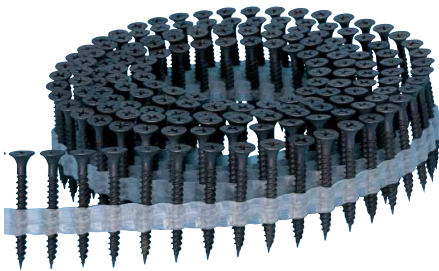

Suitable for machines and attachments	
HOLZ-HER	3350/3352/3362 Magazine screwdriver 3337 Magazine screwdriver
Prebena	9D-62-45 CS
Würth	ASSY®mat 50 with HS 16
	ASSY®mat 80 with HS 16
	ASSY®mat 50-S with TS 16

		ASSY®mat 50	ASSY®mat 50s	ASSY®mat 80	ASSY®mat 80 w/ adapter set	ASSY®plus		ASSY®plus		P. Qty.
Construction approval						with approval				
Thread		M5	M5	M6	M5	Partial thread		Partial thread		
Dia. in mm	Length in mm					Art. No. galvanized yellow	lg in mm	Art. No. stainless steel A2	lg in mm	
3.9	25	-	x	-	-	-		-		1000
	35	-	x	-	-	-		-		
	45	-	x	-	-	-		-		
4	25	x	-	-	x	-		-		
	30	x	-	-	x	-		-		
	35	x	-	-	x	<b>0163 840 35</b>	23	-		
	40	x	-	-	x	<b>0163 840 40</b>	23	<b>0166 940 40</b>	23	
4.5	45	x	-	-	x	<b>0163 840 45</b>	25	<b>0166 940 45</b>	25	
	40	-	-	-	x	-		-		
	50	-	-	x	-	-		<b>0166 945 50</b>	29	
5	60	-	-	x	-	-		<b>0166 945 60</b>	34	
	60	-	-	x	-	<b>0163 850 60</b>	33	<b>0166 950 60</b>	33	
	70	-	-	x	-	<b>0163 850 70</b>	43	<b>0166 950 70</b>	43	
	80	-	-	x	-	<b>0163 850 80</b>	43	<b>0166 950 80</b>	43	

Drive	M5 thread Length 45 mm	M6 thread Length 45 mm	P. Qty.
PH2	<b>0614 176 679</b>	-	5
PZ2	<b>0614 176 677</b>	<b>0614 176 687</b>	
AW® 20	<b>0614 542 0</b>	<b>0614 622 0</b>	

**ASSY® 3.0**    **ASSY® 3.0**  
 dia. 4.0-4.5 mm    dia. 5.0-12.0 mm



With general construction permit



With general construction permit



ETA-11/0190

**ASSY® 3.0** particle board screws are optimized for use in wooden materials. When used in plastic anchors, a reduction of the load-bearing capacity is possible. For this reason, we recommend only using screws without optimized thread tips (drilling tip, counter thread, ring thread, ground corrugated, self-clearing groove etc.), e.g. anchor screws, Pre.-No. 0157, hex. wood screws DIN 571, Pre.-No. 0192, Wüpfast® screws, Pre.-No. 0186, 0198).