


MAGAZINE SCREWDRIVER




Inch	A mm	B1/B2 mm	C mm	Art. no.	PU/Qty.
1/4"	90	121/181	37.5	0613 600 0 *	1

* Bits not included

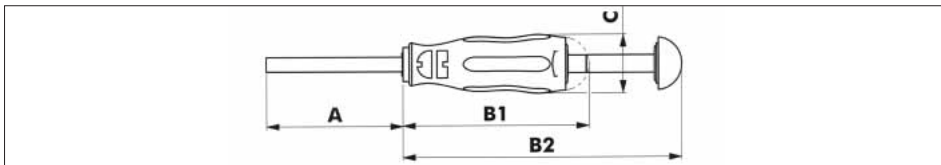

Briefly pulling on the end cap loosens the bit magazine.



Easy to remove the required bits.




Secure locking by means of "snap lock".

Equipped with 12 bits

Handle: 2-component handle.
Blade: Circular blade with magnet, bright chrome-plated.
Tip: DIN 3126-D 6.3.

- Very slim magazine screwdriver for optimum force transmission and comfortable handling.
- Pull-out, rotating magazine making it easy to find the required bit.
- 1/4" standard bits, making it easy to equip later.
- Quickly find the bits thanks to the Würth colour-coding system.
- Audible click confirms secure locking of bit magazine.

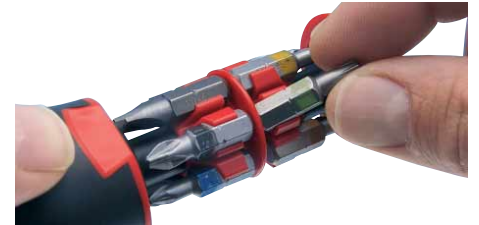

Art. no. 0613 600 1

Designation	Tip	Art. no.	Qty.
Magazine screwdriver, without bits		0613 600 0	1
PH 1		0614 176 274	1
PH 2		0614 176 461	1
PH 3		0614 176 648	1
TX 20		0614 312 0	1
TX 25		0614 312 5	1
TX 27		0614 312 7	1
TX 30		0614 313 0	1
TX 40		0614 314 0	1
Hexagon socket Size 4		0614 176 94	1
Hexagon socket Size 5		0614 176 95	1
Hexagon socket Size 6		0614 176 96	1
Slotted 0.6 x 4.5		0614 175 652	1

Art. no. 0613 600 2

Designation	Tip	Art. no.	Qty.
Magazine screwdriver, without bits		0613 600 0	1
AW[®] 10		0614 511 0	1
AW[®] 20		0614 512 0	1
AW[®] 25		0614 512 5	1
AW[®] 30		0614 513 0	1
PZ 1		0614 176 651	1
PZ 2		0614 176 652	1
PZ 3		0614 176 653	1
TX 10		0614 311 0	1
TX 20		0614 312 0	1
TX 25		0614 312 5	1
TX 30		0614 313 0	1
Slotted 0.6 x 4.5		0614 175 652	1

Art. no. 0613 600 3

Designation	Tip	Art. no.	Qty.
Magazine screwdriver, without bits		0613 600 0	1
PH 1		0614 176 274	1
PH 2		0614 176 461	1
PH 3		0614 176 648	1
TX 20 with hole		0614 352 620	1
TX 25 with hole		0614 352 625	1
TX 27 with hole		0614 352 627	1
TX 30 with hole		0614 352 630	1
TX 40 with hole		0614 352 640	1
Hexagon socket Size 4		0614 176 94	1
Hexagon socket Size 5		0614 176 95	1
Hexagon socket Size 6		0614 176 96	1
Slotted 0.6 x 4.5		0614 175 652	1

SCREWDRIVER



mm	B/C mm	mm	Art. no.	PU/Qty.
6.0	120/40	6/10	0613 473 1	1

Mount for 6-mm blade

Hexagonal insert:
With torque adjustment, brushed chromium-plated.
Tip: Mount for 6-mm blade.