


ARIZONA® PERFECT AUTOMOTIVE DRY ABRASIVE PAPER

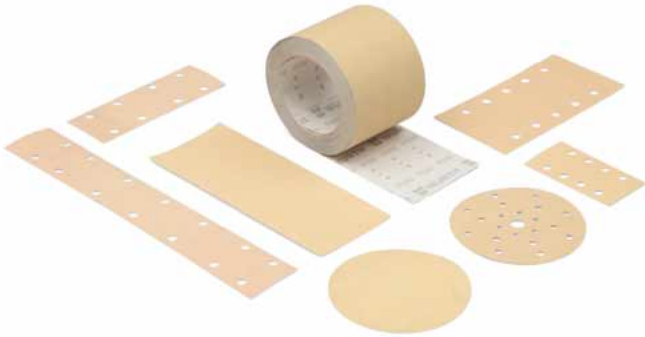

Base material	P40 - 100, D-paper P120 - 240, C-paper P280 - 600, B-paper
Bond	All-synthetic resin
Coating	P40 - 180, stearate coating P220 - 600, special coating which prevents clogging
Abrasive material	P40 - 80: ceramic grain P100 - 600: aluminum oxide
Scattering	Open scattering
Color	Sand yellow
Available grits	P40 - 600
Forms	Disks, strips and rolls

Form	Dia- meter	Width x length	Number of holes	Adhe- sion sys.	Grit	Art. No.	P. Qty.
Roll		115 mm x 25 m			40	5506 247 104	1
Roll		115 mm x 25 m			60	5506 247 106	1
Roll		115 mm x 50 m			80	5506 247 108	1
Roll		115 mm x 50 m			100	5506 247 110	1
Roll		115 mm x 50 m			120	5506 247 112	1
Roll		115 mm x 50 m			150	5506 247 115	1
Roll		115 mm x 50 m			180	5506 247 118	1
Roll		115 mm x 50 m			220	5506 247 122	1
Roll		115 mm x 50 m			240	5506 247 124	1
Roll		115 mm x 50 m			320	5506 247 132	1
Roll		115 mm x 50 m			400	5506 247 140	1
Roll		115 mm x 50 m			500	5506 247 150	1
Disk	150 mm		0 pc.	Klett	40	5506 343 004	50
Disk	150 mm		0 pc.	Klett	60	5506 343 006	50
Disk	150 mm		0 pc.	Klett	80	5506 343 008	100
Disk	150 mm		0 pc.	Klett	100	5506 343 010	100
Disk	150 mm		0 pc.	Klett	150	5506 343 015	100
Disk	150 mm		0 pc.	Klett	180	5506 343 018	100
Disk	150 mm		0 pc.	Klett	220	5506 343 022	100
Disk	150 mm		0 pc.	Klett	240	5506 343 024	100
Disk	150 mm		0 pc.	Klett	320	5506 343 032	100
Disk	150 mm		0 pc.	Klett	400	5506 343 040	100
Disk	150 mm		0 pc.	Klett	500	5506 343 050	100
Disk	150 mm		21 pc.	Klett	40	5506 353 004	50
Disk	150 mm		21 pc.	Klett	60	5506 353 006	50
Disk	150 mm		21 pc.	Klett	80	5506 353 008	100
Disk	150 mm		21 pc.	Klett	100	5506 353 010	100

For sanding old paint, filler, filler compounds, plastics, new parts for factory priming and matting of paint.

Up to 20% greater material removal and increased service life by over 90%

- P40 - 80: Coarse ceramic grain
- P220 and higher: Newly developed stearate concept

Short sanding time, effective working

- 21-hole pattern for thorough and full-surface extraction of the sanding dust
- Suitable for all common adhesive plates

Applications

Grits P40 - P120

Initial sanding of new-part factory primers (KTL paints), sanding off old paint, sanding out stone-chip damage and rusty areas, sanding dented areas down to bare metal, pre-sanding of polyester and fine filler, leveling of filler edges.

Grits P100 - P600

Initial sanding of old paint at the transition to new paint, matting of top-coat paints, sanding of plain paints, thermoplastic acrylic paints, clear lacquers, water-based paints, thick-film, priming, synthetic-resin and nitro fillers, spray filler, 2-component, MS-filler and reaction primers.