

# PNEUMATIC IMPACT WRENCH



**Powerful, fast compact impact screwdrivers with the best performance results in its class. The low weight and the size make the impact screwdriver extremely handy and enable it to be used even in tight places. Ideal for working on vehicle bodies, transmissions, brake and exhaust systems and engines. Only conditional suitability for tire changing.**

### DSS 3/8" premium mini

Art. No. 0703 311 0

### DSS 1/2" premium mini

Art. No. 0703 312 0

### High-strength fiberglass-plastic and steel hammer housing.

Rugged, long service life. The handle does not cool down during work.

### Ergonomically-shaped handle, user-friendly right/left changeover and optimally adjustable switch.

Can be operated with one hand. Extremely user-friendly.

### High-quality double impact mechanism, unique 7-disk motor and 4 tightening torques.

Long service life, high performance and perfect adaptation to the respective application.

### Three-year warranty

on manufacturing or material defects.



Technical Data												
Model	Square drive	Working torque* Nm	Max. torque Nm	Weight kg	Dimensions (L x W x H) in mm	Sound pressure level (during striking) db (A)	Connection thread in inches	Minimum hose dia. in mm	Avg. air cons. in l/min.	Avg. op. press. in bar	Art. No.	P. Qty.
DSS 3/8" premium mini	3/8"	65-339	407	1.11	151 x 56 x 179	93.2	1/4"	8	113	6.3	0703 311 0	1
DSS 1/2" premium mini	1/2"	65-375	450	1.14	155 x 56 x 179	93.2	1/4"	8	113	6.3	0703 312 0	1

\* The working torque is the torque usually reached under average working conditions. It is dependent on the highly variable ambient conditions (air pressure, hose diameter, soiling, etc.).



Available in the fleet management system ORSY®fleet.

### Nm ranges:

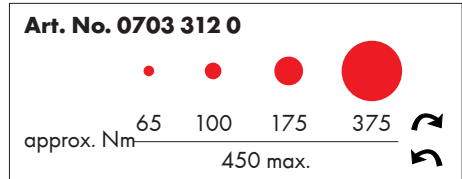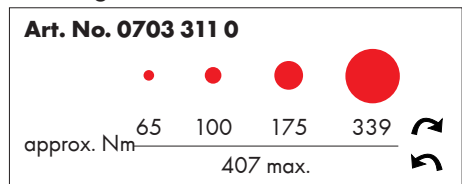

### Accessories

Designation	Art. No.	P. Qty.
Plug-in nipple with R 1/4"-male thread, made of nickel-plated steel	0699 100 614	3
Small mist oiler with 1/4" female thread	0699 070 314	1
Special oil for pneumatic tools (1l)	0893 050 5	1
Grease tube and grease syringe maintenance set	0709 213 052	1
Individual grease tube	0709 213 053	1
3/8" power socket wrench sets	0714 12 ...	1
1/2" power socket wrench sets	0714 13 ...	1

When the impact wrench is used regularly, a little oil should be refilled daily and approx. two strokes of gear grease should be refilled monthly via the grease nipple.



The changeover valve can be operated with one hand.

↻: Turn clockwise to tighten

↺: Turn counter-clockwise to loosen