

# IMPACT DRILL



**Universal 13 mm impact drill with 750 W of power; features quick drilling progress and long service life. Broad range of uses.**

### SB 13-XE

**Comes complete in ORSY BULL® machine case.**

**Art. No. 0702 322 1**


### SB 13-XE

**In box without accessories.**

**Art. No. 0702 322 0**

Delivery scope	Art. No.	P. Qty.
SB 13-XE Impact Drill	<b>0702 322 0</b>	1
Additional Handle with depth stop	<b>0708 224 720</b>	1
Deep-Drawn Part	<b>0955 030 322</b>	1
ORSY BULL® Machine Case	<b>0955 330 0</b>	1

Technical data	
Voltage	230 V
Protection class	□/II
Idling speed	0 - 1,200/0 - 3,400 rpm
1st/2nd gear	
Load speed	0 - 750/0 - 2,100 rpm
1st/2nd gear	
No. of impacts	31,500 rpm
Power consumption	750 W
Output	375 W
Drill chuck span	1 - 13 mm
Drill chuck holder	1/2" - 20 UNF
Collar dia.	43 mm Euro standard
Width across corners	32.5 mm
Cable length	4 m
Weight	2.2 kg

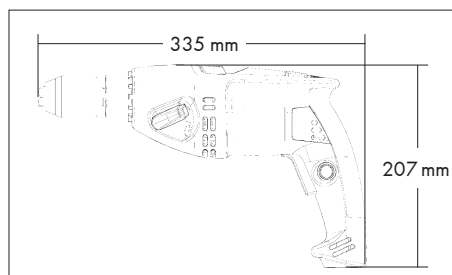


Drilling diameter	
Steel	13 mm
Concrete	20 mm
Brick/Sand lime brick	22 mm
Softwood	35 mm
Wood screws in softwood max. dia.	6 mm

- Easy switching from normal drilling to impact drilling, which makes it very versatile in use.
- Single-sleeve quick-action drill chuck with clamping force safeguard and carbide jaws. Prevents turning of the tool in the drill chuck.
- Special plug-in system for super-quick changing of a defective cable or for longer power cables.
- All-metal planetary gearing for high reliability and optimum force transmission.
- Electronic accelerator switch for continuous speed regulation.
- Two-speed switch with lock on the outside of the housing. This makes inadvertent switching impossible.
- Clockwise/counterclockwise switch on top of housing.
- Service cover allows easy carbon brush replacement. Replacement carbon brushes are also found in the handle.
- Ergonomic handle with rubber pad for increased operating comfort.
- Very stable additional handle with depth stop for a secure hold, even with high torques.
- Glass fiber-reinforced polyamide housing is stable, ergonomic and compact.
- 3-year warranty.



Clockwise/counterclockwise switch on the top of the housing ensures maximum torque in both rotation directions via optimum positioning of the carbon brushes and extends the service life of the carbons considerably.

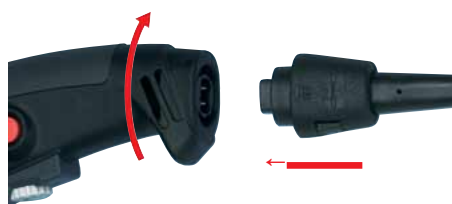

Changeable connection cable: Turn cable plug to the left and remove cable. Insert new cable and lock by turning to right.

Available separately		
Designation	Art. No.	P. Qty.
Set of Carbon Brushes	<b>0708 322 121</b>	1
Quick-Action Drill Chuck 13 mm 1/2" - 20 UNF	<b>0692 612 132</b>	1
Connection Cable, 4 m	<b>0702 690 002</b>	1
Changeable Connection Cable, 10 m	<b>0702 690 003</b>	1