


COMBINATION WRENCH





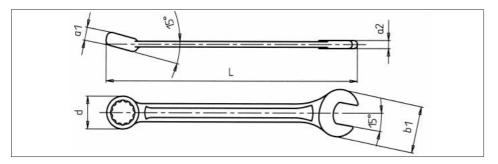

\bigcirc	L	b ₁	Dia. d	a ₁	a ₂		
in mm	in mm	in mm	in mm	in mm	in mm	Art. No.	P. Qty.
5.5	100	14.0	10.5	5.5	3.7	0713 301 055	1/10
6	100	14.0	10.5	5.5	3.7	0713 301 06	1/10
7	110	16.0	11.8	6.0	4.0	0713 301 07	1/10
8	120	18.0	13.2	6.0	4.0	0713 301 08	1/10
9	130	20.0	14.6	7.0	4.0	0713 301 09	1/10
10	140	22.5	16.1	7.5	4.5	0713 301 10	1/10
11	150	25.0	17.4	8.0	5.0	0713 301 11	1/10
12	160	27.0	18.9	8.5	5.5	0713 301 12	1/10
13	170	29.0	20.4	9.0	5.5	0713 301 13	1/10
14	180	31.0	21.6	9.5	6.0	0713 301 14	1/10
15	190	33.5	22.9	10.0	6.0	0713 301 15	1/10
16	200	36.0	24.6	10.0	6.0	0713 301 16	1/10
17	205	38.0	26.1	10.5	6.5	0713 301 17	1/10
18	215	40.0	27.7	11.0	7.0	0713 301 18	1/10
19	230	42.0	29.9	11.5	7.5	0713 301 19	1/10
20	240	45.0	30.7	12.0	8.0	0713 301 20	1/10
21	250	47.0	32.2	12.5	8.0	0713 301 21	1/10
22	260	49.0	33.7	13.5	8.0	0713 301 22	1/10
23	270	51.0	35.2	14.0	8.0	0713 301 23	1/5
24	280	53.0	36.9	14.5	9.0	0713 301 24	1/5
25	290	55.0	38.5	15.0	9.0	0713 301 25	1/5
26	300	57.0	39.8	15.5	9.0	0713 301 26	1/5
27	310	59.0	40.8	15.5	9.0	0713 301 27	1/5
28	320	62.0	42.8	16.0	9.0	0713 301 28	1/5
29	330	63.5	43.8	16.5	10.0	0713 301 29	1/5
30	340	65.0	44.8	17.0	10.0	0713 301 30	1/5
32	350	69.0	47.8	17.5	11.0	0713 301 32	1/5
34	360	73.0	50.8	18.0	12.0	0713 301 34	1/5


Set	in mm	Art. No.	P. Qty.
11	8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22	0713 301 40 ¹⁾	1
1 <i>7</i>	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22	0713 301 412)	1
28	5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19,	0713 301 42	1
	20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 34		
1) Plastic	holder, empty	0713 301 401	1
2) Plastic	holder, empty	0713 301 411	1

Version: metric, short design

- Drive: Ring side POWERDRIV®, bihexagonal
- Standard: DIN 3113A/ISO 3318/7738
- Material: Chrome-vanadium-steel
- Surface: chrome-plated, heads and ring polished
- Geometry: Ring side 15° angled down, openend position 15°

The bihexagon on the ring side and the $15\,^\circ$ open-end position are optimal in relation to the handle, resulting in a minimal angle of rotation.





The 15° angle of the ring wrench enables more space for fingers or for overcoming obstacles.



Combination Wrench Set

