


WATER PUMP PLIERS

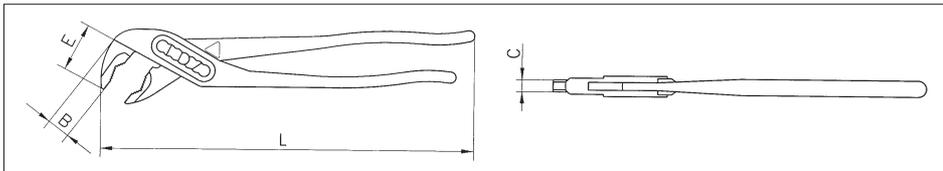



- Standard: DIN ISO 8976.
- Handle: plastic-coated
→ anti-slip.
- Teeth: inductively hardened.
- Head: painted black, sanded.
- Material: chrome-vanadium-steel, tempered.
- Joint: box, 7x adjustable
→ self-locking on pipes and nuts
→ no slipping off on workpiece.

Applications:

Pipes, nuts, flat workpieces.

| L in inches | L in mm | in inches | in mm | E in mm | B in mm | C in mm | Art. No. | P. Qty. |
|-------------|---------|-----------|-------|---------|---------|---------|-------------------|---------|
| 7 | 175 | 1 | 28 | 27 | 12 | 6 | 0714 02 75 | 1 |
| 10 | 250 | 1 | 30 | 32 | 16 | 7 | 0714 02 76 | |
| 12 | 300 | 1 1/2 | 40 | 40 | 19 | 10 | 0714 02 77 | |

PLIERS WRENCH

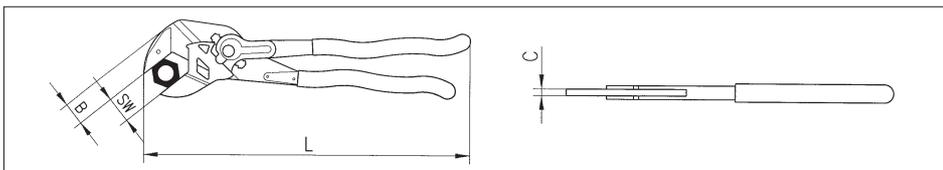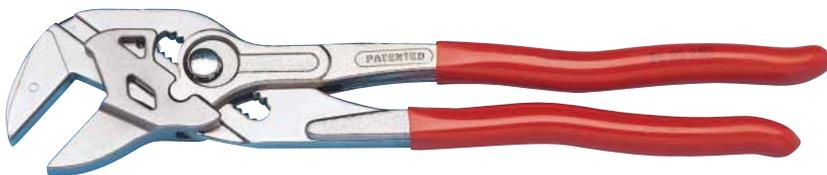


Pliers and wrench in one tool.

- Handle: plastic-coated.
- Jaws: guided in parallel, smooth, nickel-plated
→ no damage on workpiece due to gap-free surface pressure.
- Adjustment at the press of a button
→ adjustable directly on workpiece.
- Joint: box.
- Force transmission: 10x
→ high clamping force.
- The stroke between the gripping surfaces enables rapid tightening and loosening of screw connections according to the ratchet principle.


| in mm | in inches | L in mm | B in mm | C in mm | Art. No. | P. Qty. |
|-------|-----------|---------|---------|---------|--------------------|---------|
| 27 | 1 | 150 | 12.0 | 10.0 | 0715 02 515 | 1 |
| 35 | 1 3/8 | 180 | 14.0 | 12.0 | 0715 02 51 | |
| 46 | 1 3/4 | 270 | 18.5 | 16.0 | 0715 02 50 | |
| 60 | 2 3/8 | 300 | 22.0 | 16.5 | 0715 02 52 | |

Applications:

Suitable for gripping, holding, pressing and bending of workpieces; also for gentle mounting of surface-finished fittings.



Pliers wrench: gap-free surface pressure.



Ordinary wrench: edge pressing results in damage.



Working on chrome-plated fitting.



Grips all wrench sizes steplessly up to 42 mm.



Working according to the ratchet principle.



Rapid adjustment at the press of a button.