


## 1/2" Socket Bits with Double Snap-in Balls


Finish: chrome-plated, polished/matte  
 Input drive: 1/2", ball groove  
 Output drive: hexagon, metric, double ball clamping and spiral spring ring  
 Type: short, Powerdriv  
 Application: Secure hold of screw material, secure clamping even with low hexagon head and A2 screws for tight spaces.

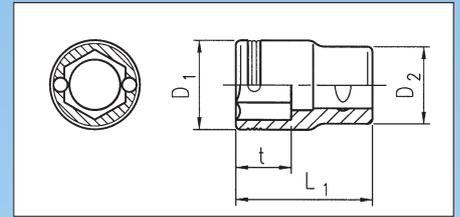

mm	L <sub>1</sub> mm	D <sub>1</sub> mm	D <sub>2</sub> mm	t mm	Art. No.	
10	36	15.3	21	6	0713 131 10	1
13	36	19	22	8	0713 131 13	
14	36	20.3	22	8.5	0713 131 14	
15	36	21.5	22	9	0713 131 15	
17	36	24	23	9.5	0713 131 17	
19	36	26.5	25	11.5	0713 131 19	

## 1/2" Screwdriver Inserts


Finish: chrome-plated, polished/matte  
 Input drive: 1/2", ball groove  
 Output drive: internal hexagon, metric, DIN 7422

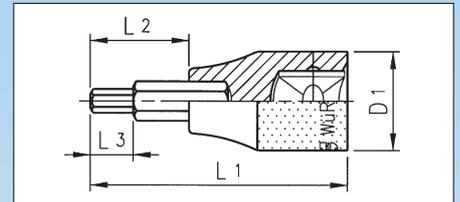

mm	L <sub>1</sub> mm	L <sub>2</sub> mm	L <sub>3</sub> mm	D <sub>1</sub> mm	Art. No.	
4	60	20	6	22.5	0715 137 040	1/10
5	60	20	7.5	22.5	0715 137 051	
5	180	140	7.5	22.5	0715 137 052	
6	60	20	9	22.5	0715 137 060	
6	90	50	9	22.5	0715 137 061	
6	140	100	9	22.5	0715 137 062	
7	60	20	10.5	22.5	0715 137 07	
7	100	60	10.5	22.5	0715 137 072	
8	60	20	-	22.5	0715 137 080	
8	90	50	-	22.5	0715 137 081	
9	60	20	13.5	22.5	0715 137 09	
10	60	20	-	22.5	0715 137 100	
10	90	50	-	22.5	0715 137 101	
10	140	100	-	22.5	0715 137 102	
12	60	20	-	22.5	0715 137 120	
12	140	100	-	22.5	0715 137 122	
13	60	20	-	25	0715 137 13	
14	60	20	-	25	0715 137 14	
17	60	20	-	-	0715 137 17	
19	60	20	-	30	0715 137 19	

## 1/2" Screwdriver Inserts

Finish: chrome-plated, polished/matte  
 Input drive: 1/2", ball groove  
 Output drive: internal hexagon, inch  
 Type: short

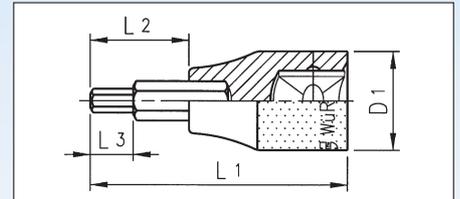

inch	L <sub>1</sub> mm	L <sub>2</sub> mm	L <sub>3</sub> mm	D <sub>1</sub> mm	Art. No.	
3/16	60	20	7.16	22.5	0715 137 50	1/10
7/32	60	20	8.34	22.5	0715 137 51	
1/4	60	20	9.53	22.5	0715 137 52	
5/16	60	20	11.9	22.5	0715 137 53	
3/8	60	20	-	22.5	0715 137 54	
7/16	60	20	14	22.5	0715 137 55	
1/2	60	20	-	22.5	0715 137 56	
9/16	60	20	-	25	0715 137 57	