


# LOAD-SECURING STRAPPING

## Ratchet straps with standard ratchet

- Complies with EN 12195-2
- GS-certified (German safety testing)
- Pressure ratchet
- Polyester straps
- Usage temperature from -40°C to +100°C
- For fast and easy load securing
- Interior label

- Attention: Colored straps are not 100% colorfast! Use in continuous rain can result in slight discoloration.

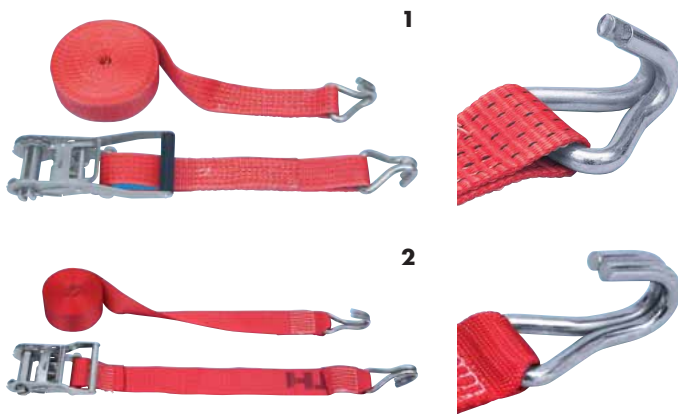

**Double-tip hook**

Fig.	LC strapping	LC straight pull	Length in m	Belt width in mm	Belt color	STF preload force*	SHF standard manual force	Art. No.	P. Qty.
1	5,000 daN	2,500 daN	8	50	Red	400 daN	50 daN	0713 91 205	1
					White	350 daN		0713 92 255	
			Red		400 daN	0713 922 285		10	
						0713 91 100		50	
	4,000 daN	2,000 daN	8		0713 91 210	1			
					0713 91 215				
			White		350 daN			0713 91 191	
								0713 92 254	
Red	400 daN	0713 91 091	10						
		0713 91 19							
2	1,000 daN	500 daN	6		Red	210 daN	0713 92 14	1	
			8				0713 92 251		
					White				

\*Straight pull