


SCREW CONNECTION UNIT

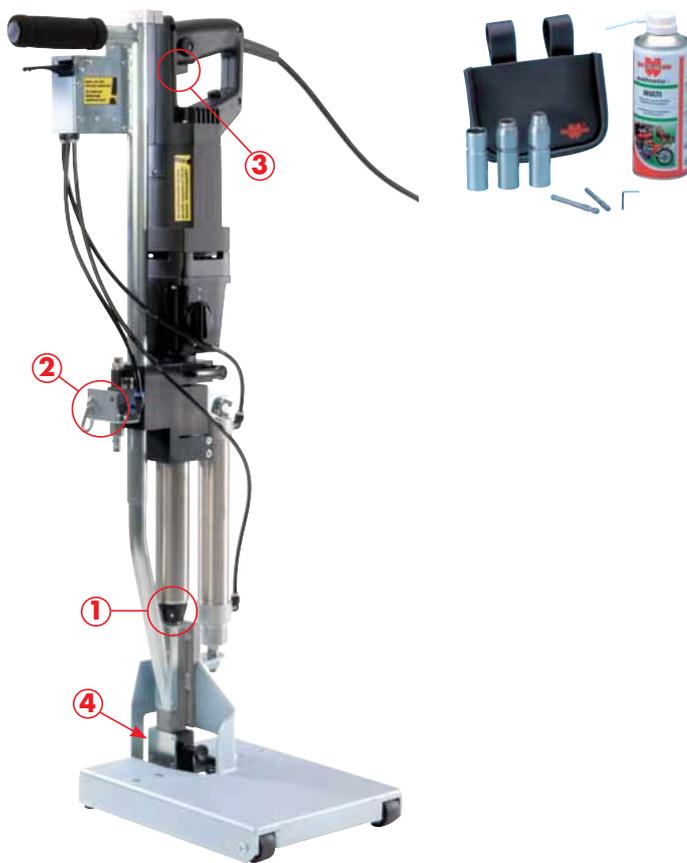


with pneumatic feed

Screw connection unit with pneumatic feed for ergonomical installation of ZEBRA® wing piás® drilling screws (Art. No. 0219 ...). The fitter works with the screw connection unit without applying force, and therefore fatigue-free in an upright working position. Through the automatic setter the drilling screw is always screwed into the installation surface at the correct angle.

VSG 80
Art. No. 0702 080 0

- ① Stepless adjustment of the screw-in depth.
 - The depth stop ensures constant setting depths, and therefore a clean appearance of the screwing pattern.
- ② Stepless adjustment of the pressing force (pneumatic feed).
 - The working pressure of the pneumatic feed can be optimally adjusted to the body weight of the user.
- ③ Stepless adjustment of the installation speed.
- ④ Markings and a large cut-out in the foot plate for aiming at the setting point.

For installing the ZEBRA® wing piás®
Art. No. 0219 ...




Delivery scope		
Designation	Art. No.	P. Qty.
VSG 80 screw connection unit incl. operating instructions	-	1
Service oil	0893 055 40	1
Offset screwdriver, size 2.5 mm	0715 31 37	1
Screw pouch	0691 800 200	1
1/4" bit, AW®30, 70 mm long	0614 573 0	1
1/4" bit, AW®40, 70 mm long	0614 574 0	1
Guide sleeve for screw head 12.5 mm dia.	0708 080 029	1
Guide sleeve for screw head 15 mm dia.	0708 080 030	1
Guide sleeve for screw head 20 mm dia.	0708 080 031	1
Drive shaft	0708 080 040	1
Retaining nut (securing of bit in drive shaft)	0708 080 041	1

Technical data	
Voltage	230 V/50 Hz
Protection class	□ /II
Power draw	1,700 W
Idling speed, 1st gear	215-560 rpm
Idling speed, 2nd gear	540-1,380 rpm
Cable length	10 m
Dimensions (LxWxH)	33x41x99 cm
Weight	20 kg
Pneumatic connection	1/4" plug-in nipple
Operating pressure	6.3 bar (90 psi)
Max. inlet pressure	8.0 bar (120 psi)
For screw diameter	5.5-8.0 mm
For screw length	38-100 mm

Application



Platform construction



Markings on the bottom plate for aiming at the setting point

Accessories (not included)

Bottom plate, "folding" Art. No. 0708 080 055

Suitable for screwing tightly to the wall. The upper section of the machine can be folded toward the rear, e.g. when working on lorry tailboards and side walls.

