

## TORQUE TOOLS

Torque wrenches are precision tools which must be checked at regular intervals with suitable


measuring equipment and adjusted if necessary. We recommend an annual calibration by our

masterSERVICE.

### TORQUE WRENCH



- Accuracy of  $\pm 3\%$  to the set value, in accordance with DIN EN ISO 6789:2003.
- Easy and precise adjustment by turning the handle.
- Square coupler drive.
- Scaling in both Nm and lbf.ft.
- Acoustic, tangible perception of the torque triggering prevents over-tightening of bolts.
- Anti-slip 2-component handle.
- Following use, relax the spring and set to the lowest value.
- With calibration certificate.
- Delivery in a plastic box.

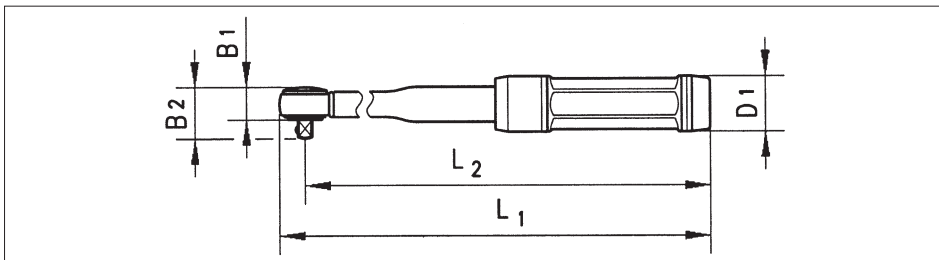

Drive	Measuring range		L <sub>1</sub> mm	L <sub>2</sub> mm	B <sub>1</sub> mm	B <sub>2</sub> mm	D <sub>1</sub> mm	Art. No.	P. Qty.
	Nm	lbf.ft.							
3/8"	20-100	15- 80	350	330	22	33	37	<b>0714 71 21</b> <sup>1</sup>	1
1/2"	20-100	15- 80	350	330	22	37	37	<b>0714 71 22</b> <sup>2</sup>	1
1/2"	40-200	30-150	440	420	26	42	37	<b>0714 71 23</b> <sup>3</sup>	1
1/2"	60-300	45-220	570	550	26	45	37	<b>0714 71 24</b> <sup>4</sup>	1

Available in fleet management  
**ORSY®fleet.**

### TORQUE WRENCH



- Accuracy of  $\pm 3\%$  to the set value, in accordance with DIN EN ISO 6789:2003.
- Easy and precise adjustment by turning the handle.
- Square coupler drive.
- Acoustic, tangible perception of the torque triggering prevents over-tightening of bolts.
- Following use, relax the spring and set to the lowest value.
- With calibration certificate.
- Delivery in a plastic box.

Drive	Measuring range		Length in mm	Weight in g	Head dia. mm	Art. No.	P. Qty.
	Nm	lbf.ft.					
3/4"	110-550	80-405	850	3,760	60	<b>0714 71 26</b> <sup>5</sup>	1
3/4"	300-1,000	220-740	1,750*	5,800	75	<b>0714 71 25</b> <sup>6</sup>	1

\* incl. 500 mm extension

Available in fleet management  
**ORSY®fleet.**