


## MEASURING CABLES

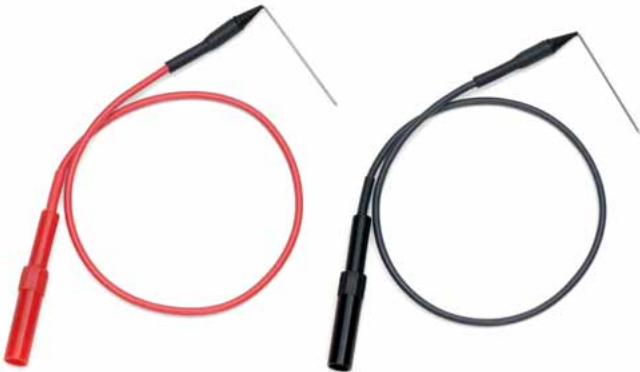

### Angled at one end, needle-shaped test tips.

- For measurements on cramped measuring points with socket for all 4-mm plug connectors.
- Cable length: 250 mm, total length: 300 mm.
- Rated voltage <math><50\text{ V}</math>.

**Art. No. 0715 531 004**

P. Qty./Pair 1



### Angled at one end.

- Double-insulated 1.2 m silicone measuring cables each with 1 x 4 mm safety plug, angled
- Rated voltage IEC1010 1000V CAT III 20 A.

**Art. No. 0715 531 005**

P. Qty./Pair 1



### Straight.

- Double-insulated 1.2 m silicone measuring cables, each with 1 x 4 mm safety plug, straight.
- Rated voltage IEC1010 1000V CAT II 20 A.

**Art. No. 0715 531 006**

P. Qty./Pair 1

**Silicone cables = Temperature-resistant up to 150°C permanently – briefly up to 250°C, so more suitable for use in engine compartments than PVC cables (temperature-resistant up to 70°C) .**  
**Very flexible and bend-resistant at low temperatures thanks to repeatedly twisted copper wire.**