

TORQUE TOOLS

Torque wrenches are precision tools which must be checked at regular intervals with suitable mea-

suring equipment and adjusted if necessary. We recommend an annual calibration by our

masterSERVICE.

ANGLE MEASURING DEVICE



Dia. in mm	Measuring range	Weight g	Art. No.	P. Qty.
75	0-360°	270	0713 71 12	1

- For rotation angle-controlled screw tightening.
- 1/2" □ drive, 1/2" ■ drive.
- After tightening the screwed connection to the respective torque, the pointer of the rotation angle measuring device is set to "0" and the screw connection is retightened by the specified angle.
- Moving point adjustable to "0" in any position.

TORQUE WRENCH




- Accuracy of $\pm 6\%$ to the set value, in accordance with DIN EN ISO 6789:2003.
- Adapter 1/4" hexagon drive on 1/4" square.
- Acoustic, tangible perception of the torque triggering prevents over-tightening of bolts.
- Following use, relax the spring and set to the lowest value.
- With calibration certificate.
- Delivery in a plastic box.

Drive	Measuring range in Nm	Length in mm	Weight in g	Art. No.	P. Qty.
1/4" hexagon	1-5	170	110	0714 71 19	1

Available in fleet management
ORSY®fleet.

TORQUE WRENCH

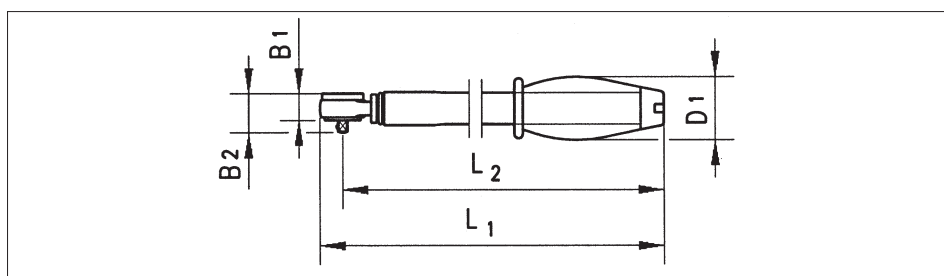

Drive	Measuring range in Nm	L ₁ mm	L ₂ mm	B ₁ mm	B ₂ mm	D ₁ mm	Art. No.	P. Qty.
1/4"	4-20	220	205	17	25	40	0714 71 20	1

- Accuracy of $\pm 3\%$ to the set value, in accordance with DIN EN ISO 6789:2003.
- Easy and precise adjustment by turning the handle.
- Switch-over square drive.
- With fine-toothed ratchet head (72 teeth) for working in extremely tight spaces.
- Scale in Nm.
- Acoustic, tangible perception of the torque triggering prevents over-tightening of bolts.
- Following use, relax the spring and set to the lowest value.
- With calibration certificate.
- Delivery in a cardboard box.

Available in fleet management
ORSY®fleet.