


Protective Jaws

- With special magnet holder.
→ Clamped pieces will not be magnetised.



	100 mm Art. No.	125 mm Art. No.	135 mm Art. No.	150 mm Art. No.	
Prism	–	–	0715 671 12	0715 671 13	1
Alu	0715 671 05	–	0715 671 06	0715 671 07	
Fibre	–	–	0715 671 09	0715 671 10	
Polyurethane	–	0715 671 15	–	0715 671 17	

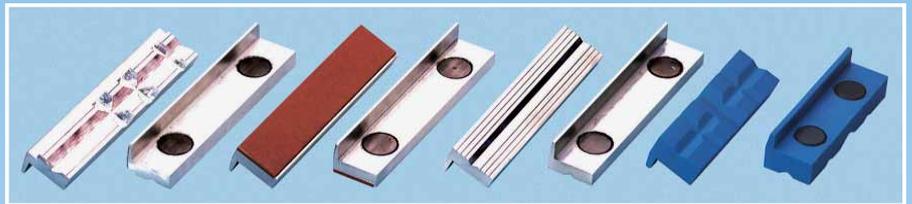

Aluminium

For coarse to medium fine workpieces. Special aluminium alloy. 6 longitudinal grooves guarantee secure clamping. One deeper groove to hold round workpieces.



Fibre

For fine workpieces. Aluminium profile with fibre covering. For use where clamping marks and deformations are to be avoided. Heat resistant.



Prism

Special aluminium alloy. Vertical and horizontal grooves. Collar for clamping of square workpieces. Use one jaw only for thread cutting.



Polyurethane

With prism-shaped recesses. High ductility and deformation capability. No damage to workpieces.