


# BLIND RIVET

## Round pan head

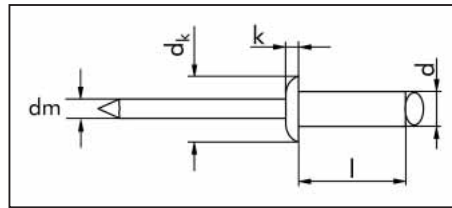


**Sleeve:** Aluminum  
**Pin:** Galvanized steel,  
 blue passivated (A2K)

Mid-strength riveting range

d x l in mm	Drill hole dia. in mm	Clamping range in mm	dk in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
3.0 x 6.7	3.1-3.3	0.8-4.3	6.5	1.1	1.7	700	820	0915 300 43	500

Storable in **ORSY**

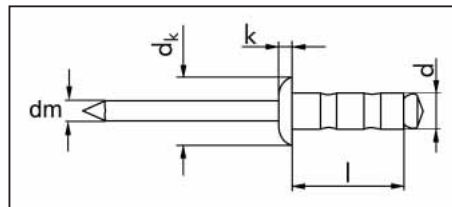


## Round pan head

**Sleeve:** Aluminum, black anodized  
**Pin:** Galvanized steel,  
 blue passivated (A2K)

d x l in mm	Drill hole dia. in mm	Clamping range in mm	dk in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
3.2 x 8.0	3.3-3.5	0.8-4.8	6.4	1.1	1.8	750	820	0915 593 28	500
3.2 x 11.0	3.3-3.5	4.0-8.0	6.4	1.1	1.8	750	820	0915 593 211	500
4.0 x 10.0	4.1-4.3	1.2-6.3	8.0	1.4	2.2	1,200	1,600	0915 594 010	500
4.0 x 13.0	4.1-4.3	4.0-9.6	8.0	1.4	2.2	1,200	1,600	0915 594 013	500
4.0 x 17.0	4.1-4.3	6.4-12.7	8.0	1.4	2.2	1,200	1,600	0915 594 017	250
4.8 x 10.0*	4.9-5.1	1.6-6.3	9.6	1.6	2.7	1,600	2,230	0915 594 810	250
4.8 x 15.0	4.9-5.1	4.8-11.1	9.6	1.6	2.7	1,600	2,230	0915 594 815	250
4.8 x 25.0	4.9-5.1	12.7-19.8	9.6	1.6	2.7	1,600	2,230	0915 594 825	250

Storable in **ORSY**

\* General construction permit for 4.8 mm dia.

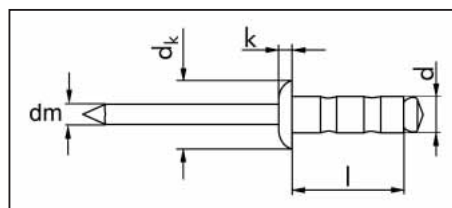

## Round pan head

**Sleeve:** Aluminum, head-painted rivet  
 pure white RAL 9010  
**Pin:** Galvanized steel,  
 blue passivated (A2K)

d x l in mm	Drill hole dia. in mm	Clamping range in mm	dk in mm	k in mm	dm in mm	Shear fracture load in N	Tensile fracture load in N	Art. No.	P. Qty.
3.2 x 8	3.3-3.5	0.8-4.8	6.4	1.1	1.8	750	820	0915 583 28	500
3.2 x 11	3.3-3.5	4.0-8.0	6.4	1.1	1.8	750	820	0915 583 211	500
4.0 x 10	4.1-4.3	1.2-6.3	8.0	1.4	2.2	1,200	1,600	0915 584 010	500
4.0 x 13	4.1-4.3	4.0-9.6	8.0	1.4	2.2	1,200	1,600	0915 584 013	500
4.8 x 10*	4.9-5.1	1.6-6.3	9.6	1.6	2.7	1,600	2,230	0915 584 810	250
4.8 x 15	4.9-5.1	4.8-11.1	9.6	1.6	2.7	1,600	2,230	0915 584 815	250

Storable in **ORSY**

\* General construction permit for 4.8 mm dia.