



Blind Rivets

Round pan head

Sleeve: Aluminum, white lacquered
Pin: Stainless steel A2

Mid-strength riveting range

d x l in mm	Drill hole dia. in mm	Clamping range in mm	dk in mm	k in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
4.0 x 10	4.1 – 4.3	0.5 – 6.3	8.0	1.4	1,150	1,630	0915 774 064	500
4.0 x 13	4.1 – 4.3	4.0 – 9.6	8.0	1.4	1,150	1,630	0915 774 096	500

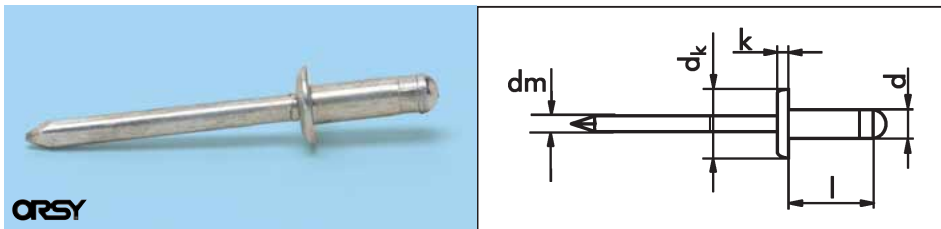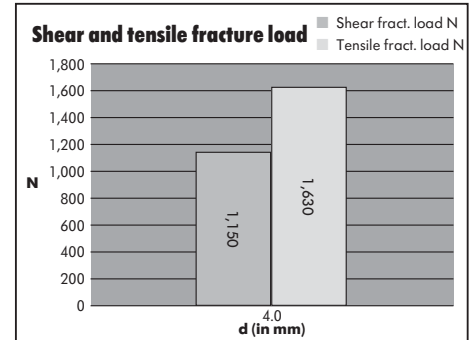

Blind Rivets

Round pan head

**Sleeve: Galvanized steel,
blue passivated (A2K)**

**Pin: Galvanized steel,
blue passivated (A2K)**

d x l in mm	Drill hole dia. in mm	Clamping range in mm	dk in mm	k in mm	dm max. in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
3.2 x 9.0	3.3 – 3.4	1.1 – 4.0	7.2	1.0	2.1	1,335	1,710	0916 32 40	500
4.0 x 11.0	4.1 – 4.2	1.4 – 5.0	8.1	1.4	2.7	1,955	2,355	0916 40 50	500
4.8 x 10.0	4.9 – 5.1	1.2 – 4.8	9.8	1.8	3.4	3,605	3,335	0916 48 47	250
4.8 x 12.7	4.9 – 5.1	4.0 – 6.3	9.8	1.8	3.4	4,560	3,470	0916 48 64	250

