

# Blind Rivets

## Round pan head



**Sleeve:** Aluminum, black lacquered  
**Pin:** Galvanized steel, blue passivated (A2K)

**Standard riveting range**

### The secure connection

- Ideal shaping properties enable different materials to be connected (e.g. metal and wood, metal and plastic, connections to stone, concrete and other construction materials).
- High resistance to corrosion.
- High strength under radial and axial load on the rivet connection.
- Even connection of the closing head.
- No over-turning.
- Riveting of large-area parts is possible.
- Easy to use while carrying out assembly work.

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d <sub>k</sub> in mm	k in mm	dm in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.
3.2 x 8.0	3.3	3.5 – 5.5	9.5	1.0	1.75	785	1,200	<b>0936 132 8</b>	500
4.0 x 8.0	4.1	3.0 – 5.0	12.0	1.4	2.10	1,300	1,900	<b>0936 14 8</b>	
4.0 x 16.0	4.1	8.5 – 12.5	12.0	1.4	2.10	1,300	1,900	<b>0936 14 16</b>	
4.8 x 16.0	4.9	6.0 – 12.0	12.0	1.4	2.60	1,600	2,700	<b>0936 148 16</b>	

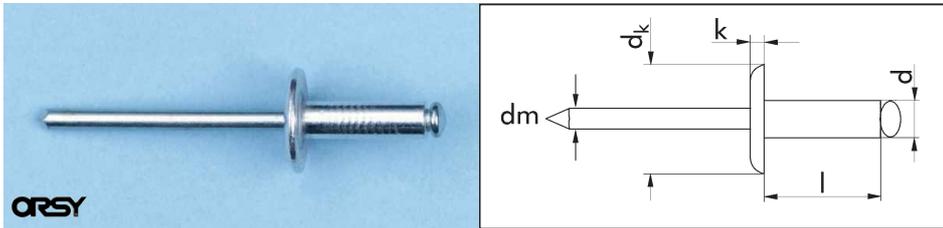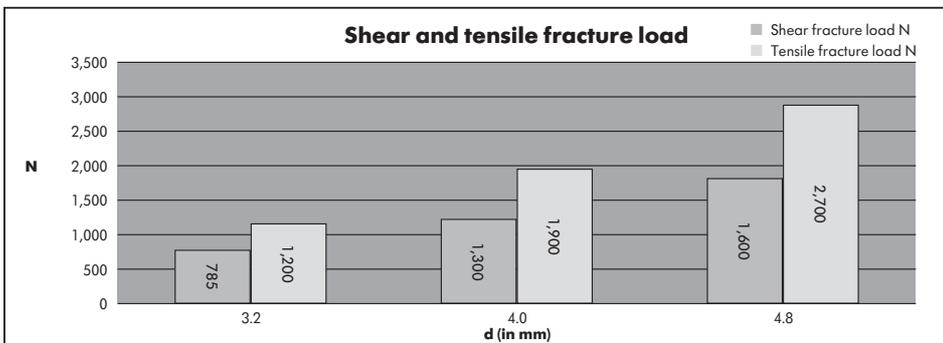

# Blind Rivets

## Large round pan head

**Sleeve:** Aluminum  
**Pin:** Galvanized steel, blue passivated (A2K)

d x l in mm	Drill hole dia. in mm	Clamping range in mm	d <sub>k</sub> in mm	k in mm	dm in mm	Shear fract. load N	Tens. fract. load N	Art. No.	P. Qty.					
4.0 x 8.5	4.1	3.0 – 5.0	12.0	1.4	2.1	1,400	2,000	<b>0944 4 85</b>	250					
5.0 x 8.0	5.1	0.5 – 4.5	11.0	1.5	2.7	2,100	2,800	<b>0944 11 8</b>	500					
5.0 x 10.0	5.1	4.5 – 6.0						<b>0944 11 10</b>	500					
5.0 x 12.0	5.1	6.0 – 8.0						<b>0944 11 12</b>	500					
5.0 x 16.0	5.1	8.0 – 12.0						<b>0944 11 16</b>	500					
5.0 x 20.0	5.1	12.0 – 16.0						<b>0944 11 20</b>	250					
5.0 x 25.0	5.1	16.0 – 21.0						<b>0944 11 25</b>	250					
5.0 x 30.0	5.1	21.0 – 25.0						<b>0944 11 30</b>	250					
5.0 x 8.0	5.1	0.5 – 4.5						14.0	1.5	2.7	2,100	2,800	<b>0944 14 8</b>	250
5.0 x 10.0	5.1	4.5 – 6.0											<b>0944 14 10</b>	250
5.0 x 12.0	5.1	6.0 – 8.0											<b>0944 14 12</b>	250
5.0 x 14.0	5.1	8.0 – 10.0	<b>0944 14 14</b>	250										
5.0 x 16.0	5.1	10.0 – 12.0	<b>0944 14 16</b>	250										
5.0 x 18.0	5.1	13.0 – 15.0	<b>0944 14 18</b>	250										
5.0 x 20.0	5.1	12.0 – 16.0	<b>0944 14 20</b>	250										

