


BLIND RIVETS

Round pan head

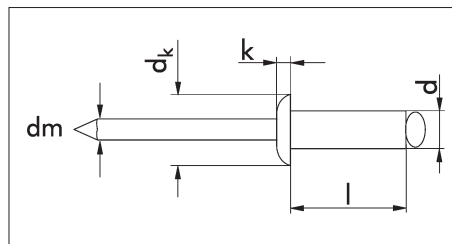

Sleeve: Stainless steel A4
Pin: Stainless steel A4

Standard riveting range

d x l mm	Drilled hole dia. mm	Clamping range mm	dk mm	k mm	dm mm	Shear fracture load N	Tensile fracture load N	Art. no.	PU Qty.	
3.0 x 6	3.1	1.0 - 3.0	6.5	0.8	1.85	1370	1940	5141 130 6	500	
3.0 x 8		3.0 - 5.0						5141 130 8		
3.0 x 10		5.0 - 7.0						5141 130 10		
3.0 x 12		7.0 - 9.0						5141 130 12		
3.2 x 6	3.3	1.0 - 3.0	6.5	0.8	1.95	1720	2350	5141 132 6		
3.2 x 8		3.0 - 5.0						5141 132 8		
3.2 x 10		5.0 - 7.0						5141 132 10		
3.2 x 12		7.0 - 9.0						5141 132 12		
4.0 x 6	4.1	1.0 - 2.5	8.0	1.0	2.45	2800	3800	5141 140 6		100
4.0 x 8		2.5 - 4.5						5141 140 8		
4.0 x 10		4.5 - 6.5						5141 140 10		
4.0 x 12		6.5 - 8.5						5141 140 12		
4.0 x 14		7.5 - 10.5						5141 140 14		
4.0 x 16		10.5 - 12.0						5141 140 16		
4.0 x 18		12.0 - 14.0						5141 140 18		
4.0 x 20		14.0 - 16.0						5141 140 20		
4.8 x 8	4.9	1.5 - 4.0	9.5	1.1	2.9	4060	5030	5141 148 8		
4.8 x 10		4.0 - 6.0						5141 148 10		
4.8 x 12		6.0 - 8.0						5141 148 12		
4.8 x 14		8.0 - 9.5						5141 148 14		
4.8 x 16		8.0 - 11.0						5141 148 16		
5.0 x 8	5.1	2.0 - 4.0	9.5	1.1	2.9	4430	5480	5141 150 8		
5.0 x 10		4.0 - 6.0						5141 150 10		
5.0 x 12		6.0 - 8.0						5141 150 12		
5.0 x 14		8.0 - 10.0						5141 150 14		
5.0 x 16		10.0 - 12.0						5141 150 16		

Can be stored in ORSY® system