


BLIND RIVETS

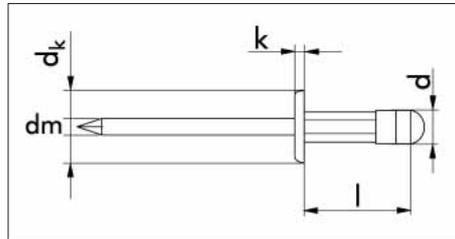


Round pan head

Sleeve: Aluminium
Pin: Stainless steel A2


Mid-strength riveting range

d x l mm	Drilled hole dia. mm	Clamping range mm	dk mm	k mm	dm mm	Shear fracture load N	Tensile fracture load N	Art. no.	PU Qty.
3.2 x 8.0	3.3-3.5	0.5-5.0	6.2	1.1	1.8	700	980	0914 32 48	500
3.2 x 11.0		4.0-8.0						0914 32 64	
4.0 x 10.0	4.1-4.3	1.2-6.3	8.0	1.4	2.2	1200	2400	0914 40 64	
4.0 x 13.0		4.0-9.6						0914 40 96	
4.0 x 17.0		6.4-12.7						0914 40 127	
4.8 x 10.0	4.9-5.1	1.5-6.5	9.9	1.6	2.7	1470	2400	0914 48 64	
4.8 x 15.0		4.5-11.0						0914 48 110	
4.8 x 25.0		12.5-20.0						0914 48 198	

Can be stored in ORSY® system

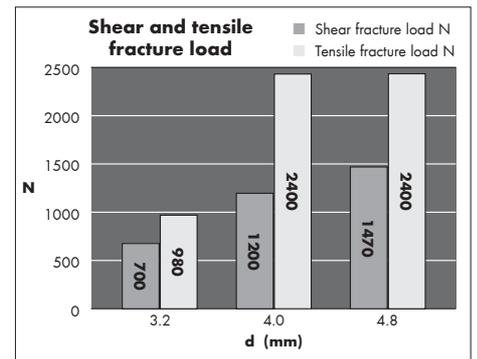

BLIND RIVETS

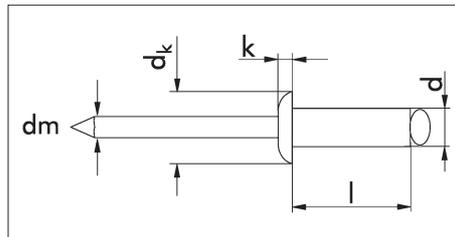

Round pan head

Sleeve: Aluminium, anodized brown
Pin: Stainless steel A2

d x l mm	Drilled hole dia. mm	Clamping range mm	dk mm	k mm	dm mm	Shear fracture load N	Tensile fracture load N	Art. no.	PU Qty.
4.0 x 10	4.1-4.3	1.2-6.3	8.0	1.4	2.2	1150	1630	0915 740 64	500
4.0 x 13		4.0-9.6						0915 740 96	

Can be stored in ORSY® system

