

PRE-STRETCHED PACKFIX



Packaging film for optimal securing of load units with low consumption.

Film already pre-stretched with special production process

- 50–60% lower consumption, therefore extremely environmentally friendly and gentle to resources.
- Pleasant handling due to low roll weight.
- No strenuous pre-stretching of film required.

Reduced slipping of product on pallet

Excellent securing of load unit with higher holder strength.

Doubled edges prevent tearing and provide additional safety


Color	Width in mm	Length in m	Thickness in µm	Art. No.	P. Qty.
transparent	430	600	8	0992 900 210	6

Technical Data:	
Foil material	polyethylene
Production method	blown film
Temperature resistance	up to +70 °C
UV resistance	max. 6 months
Disposal	recyclable PE film
Storage	dry, at +20 °C
Guaranteed stretching	already pre-stretched
Weight per roll approx.	2.2 kg

Applications:

For packaging, bundling and securing, e.g. of pallets and packages without overhang and without sharp edges.

Suitable pallet shapes:

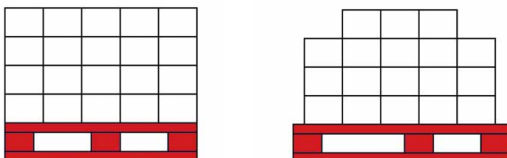

Handle sleeves

Accessories:			
Designation	Can be used for	Art. No.	P. Qty.
Handle sleeves	500/430 mm film width	0992 902	10 (5 pairs)
Ergo Sliding Sleeves	500/430 mm film width	0992 902 001	2 (1 pair)



Ergo Sliding Sleeves