

PACKFIX



For fast packing without cutting and gluing.

No adhesive residues

When removing film from the product, no adhesive residues are left behind.

Good mouldability

Corners, edges and curves etc. can also be packaged and/or protected quickly and reliably with the film. This also means considerable time is saved.

Fast to tear off

The film can easily be torn off by dragging on the protruding section of the winding core. As a result, no extra cutting tools are required to cut the film.

Transparent film

Despite the packaging, adhesive information, address or designation labels and the product itself can be seen.

Black film

Opaque colouration around product to protect against theft and exposure to sunlight.


Colour	Width mm	Length m	Thickness in	Art. no.	PU
Transparent	100	150	23	0992 900 1	10
	500	270	20	0992 900 2	6
Black	500	270	20	0992 900 220	6

Technical data:	
Foil material	Polyethylene
Temperature resistance	Up to +70 °C
Ultraviolet resistance	max. 6 months
Disposal	Recyclable PE film
Storage	dry, at +20 °C
Guaranteed stretching	200%

Application area:

For packaging, bundling, protecting and securing a broad range of articles, e.g. for packages, pallets, accessory articles, wooden strips, window profiles, carpet rolls, picture frames, wrapping steering wheels etc. in place of adhesive tape.

Suitable pallet shapes:

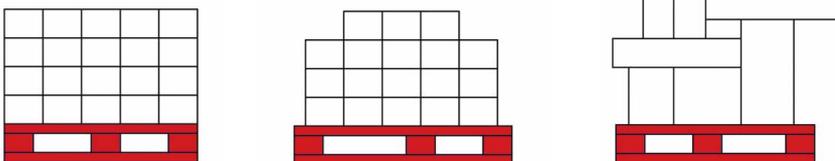

Accessories: Film dispenser			
Designation	Can be used for	Art. no.	PU
Handle	100 mm foil width	0992 901	3
Handle sleeves	500/430 mm foil width	0992 902	10 (5 pairs)
Ergo sliding sleeves	500/430 mm foil width	0992 902 001	2 (1 pair)



Handle for 100-mm film.



Handle sleeves for 430 and 500 mm film.



Ergo sliding sleeves for 430 and 500 mm film.