


MULTI-PURPOSE RIVET

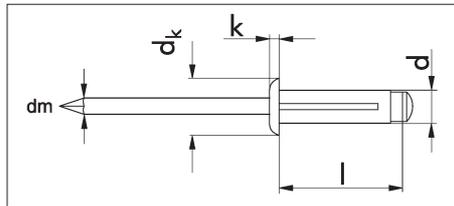


Round pan head

Sleeve: Aluminum
Pin: Aluminum
Special riveting range

| d x l in mm | Drill hole dia. in mm | Clamping range in mm | d _k in mm | k in mm | dm in mm | Shear fract. load N | Tens. fract. load N | Art. No. | P. Qty. |
|----------------|-----------------------------|----------------------------|----------------------------|---------------|----------------|---------------------------|---------------------------|--------------|------------|
| 4.0 x 21.0 | 4.2 - 4.4 | 1.0 - 7.0 | 8.2 | 1.6 | 3.2 | 600 | 1000 | 0914 040 21 | 250 |
| 4.8 x 15.0 | 5.0 - 5.1 | 1.0 - 4.0 | 10.0 | 2.1 | 3.2 | 800 | 1100 | 0914 048 50 | 250 |
| 4.8 x 21.0 | 5.0 - 5.1 | 1.0 - 9.0 | 10.0 | 2.1 | 3.2 | 800 | 1100 | 0914 048 100 | 250 |

Can be stored in ORSY® system

PLASTIC COVER CAPS

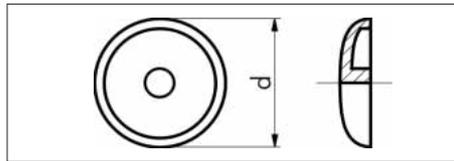


for Art. No. 0914 048 50
0914 048 100

| d in mm | Color | RAL No. | Art. No. | P. Qty. |
|---------|------------|---------|------------|---------|
| 11.5 | black | 9005 | 0590 914 1 | 500 |
| 11.5 | pure white | 9010 | 0590 914 2 | 500 |

Can be stored in ORSY® system

SOFT-CLAW-BLIND-RIVET

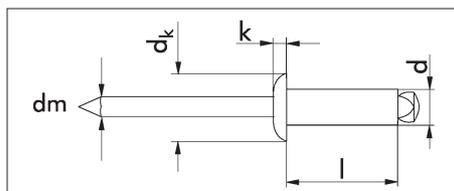

Sleeve: Aluminum
Pin: Galvanized steel,
blue passivated (A2K)

| d x l in mm | Drill hole dia. in mm | Clamping range in mm | d _k in mm | k in mm | dm in mm | Shear fract. load N | Tens. fract. load N | Art. No. | P. Qty. |
|----------------|-----------------------------|----------------------------|----------------------------|---------------|----------------|---------------------------|---------------------------|--------------|------------|
| 4 x 10 | 4.5 | 1.5 - 5.0 | 11.0 | 1.2 | 2.1 | 1,280 | 1,140 | 0937 004 10 | 500 |
| 4 x 12 | 4.5 | 4.0 - 6.5 | 11.0 | 1.2 | 2.1 | 1,280 | 1,140 | 0937 004 12 | 500 |
| 4 x 14 | 4.5 | 6.0 - 9.0 | 11.0 | 1.2 | 2.1 | 1,280 | 1,140 | 0937 004 14 | 500 |
| 4 x 16 | 4.5 | 8.0 - 11.0 | 11.0 | 1.2 | 2.1 | 1,280 | 1,140 | 0937 004 16 | 500 |
| 4 x 18 | 4.5 | 10.0 - 13.0 | 11.0 | 1.2 | 2.1 | 1,280 | 1,140 | 0937 004 18 | 500 |
| 4 x 20 | 4.5 | 12.0 - 15.0 | 11.0 | 1.2 | 2.1 | 1,280 | 1,140 | 0937 004 20 | 500 |
| 4.8 x 10 | 5.3 | 0.5 - 4.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 810 | 500 |
| 4.8 x 12 | 5.3 | 2.0 - 6.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 812 | 500 |
| 4.8 x 14 | 5.3 | 4.0 - 8.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 814 | 500 |
| 4.8 x 16 | 5.3 | 6.0 - 10.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 816 | 500 |
| 4.8 x 18 | 5.3 | 8.0 - 12.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 818 | 500 |
| 4.8 x 20 | 5.3 | 10.0 - 14.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 820 | 500 |
| 4.8 x 21 | 5.3 | 8.0 - 15.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 821 | 500 |
| 4.8 x 22 | 5.3 | 12.0 - 16.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 822 | 500 |
| 4.8 x 25 | 5.3 | 16.0 - 19.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 825 | 500 |
| 4.8 x 30 | 5.3 | 19.0 - 24.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 830 | 500 |
| 4.8 x 35 | 5.3 | 24.0 - 29.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 835 | 500 |
| 4.8 x 40 | 5.3 | 29.0 - 34.0 | 11.0 | 1.3 | 2.7 | 2,100 | 2,450 | 0937 004 840 | 500 |

Can be stored in ORSY® system