


CREPED MASKINGTAPE

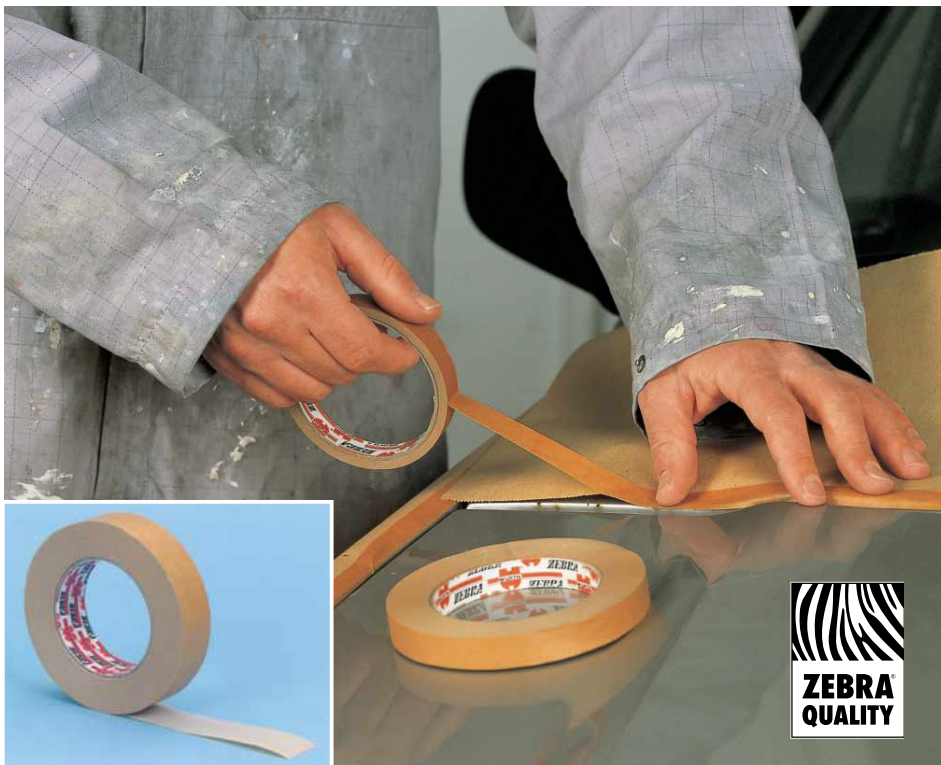

High-quality creped masking tape for professional painting work.

Heat-resistant up to +110 °C.

The tape is also ideal for painting work where oven-drying is required.

Latex-impregnated paper backing.

The adhesive tape is suitable for painting work with all conventional paint and varnish systems containing solvents as well as aqueous systems. Also ideal for use when wet sanding.

Very good adhesive power and adaptability.

Very good adhesion to all smooth surfaces found in the construction and automotive fields is ensured, e.g. painted metal, glass, chrome parts and rubber. The tape can be pulled off without leaving any residue right after painting is completed. The tape still adheres very well to the taped surface even after wet sanding or oven-drying.

Can be written on.

The tape is ideal for labeling boxes, cans etc.

Width in mm	Length in m	Thickness in mm	Art. No.	P. Qty.
15	50	0.18	0992 615	20
19	50	0.18	0992 619	16
25	50	0.18	0992 625	12
30	50	0.18	0992 630	10
38	50	0.18	0992 638	8
50	50	0.18	0992 650	6

Applications

- Painting work on vehicle bodies and painting work where oven-drying is required.
- Covering work in the painting field.
- Cover paper attachment.
- Labeling of boxes and cans.

Technical data	
Adhesive basis	Rubber-resin adhesive
Carrier	Latex-impregnated, creped paper (brown)
Adhesive strength	10.5 N/25 mm
Elongation at tear	10.5%
Application temperature	+ 15 °C to + 40 °C
Thermal stability	- 20 °C to + 110 °C
Shelf life (at approx. + 20 °C and 50% humidity)	12 months
UV-resistance	Not a given
Moisture-resistance	Yes

With this information, we want to advise you to the best of our knowledge based on our tests and experience. We assume no liability for the application results in individual cases, however, due to the large number of applications and the storage and application conditions that lie outside the scope of our influence.

This also applies to the use of the non-binding technical and commercial customer service we provide. We always recommend that you conduct your own tests. We guarantee the consistent quality of our products. We reserve the right to make technical changes and carry out further development.

Notes on application

- To ensure residue-free removal, the tape must be removed immediately after the paint/varnish has dried.
- The adhesive tape is **not** UV-resistant and is therefore not suitable for outdoor applications.

Additional products
Bordering Tape
Art. No. 0992 66 P. Qty. 1