



Rivet nuts with small countersunk head, galvanized steel, blue passivated (A2B)

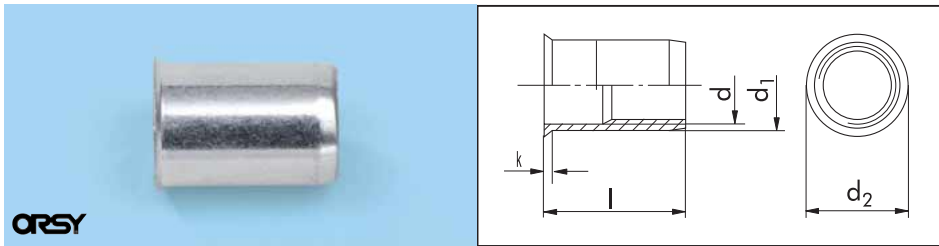


d	Drilled hole dia. in mm	Clamping range in mm	d ₂ in mm	l in mm	d ₁ in mm	Head height k in mm	Art. No.	P. Qty.
M3	4.8	0.3 – 1.5	5.4	8.5	4.7	0.40	0917 30	100/500
M4	6.4	0.3 – 2.0	7.1	10.5	6.3	0.50	0917 40	
M5	7.2	0.5 – 3.0	7.9	12.0	7.1	0.50	0917 50	
M6	9.5	0.5 – 3.0	10.2	14.0	9.4	0.60	0917 60	100/250
M8	10.5	0.5 – 3.0	11.3	16.0	10.4	0.60	0917 80	50/100
M10	14.2	1.0 – 3.0	15.4	17.0	14.1	0.60	0917 100	

Rivet nuts with round pan head, galvanized steel, blue passivated (A2B)

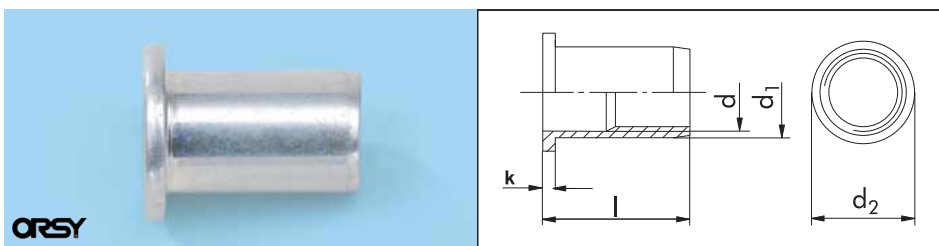

d	Drilled hole dia. in mm	Clamping range in mm	d ₂ in mm	l in mm	d ₁ in mm	Head height k in mm	Art. No.	P. Qty.
M4	6.0	0.3 – 2.0	9.0	10.5	5.9	0.8	0917 240	100/500
M5	7.0	0.7 – 3.0	10.0	14.0	6.9	1.0	0917 250	
M6	9.0	0.5 – 3.0	13.0	16.0	8.9	1.5	0917 260	
M8	11.0	0.5 – 3.5	16.0	17.0	10.9	1.5	0917 280	50/100
M10	13.0	0.8 – 3.5	19.0	23.0	12.9	2.0	0917 210 0	

Rivet nuts with small countersunk head and shaft-knurling, galvanized steel, blue passivated (A2B)

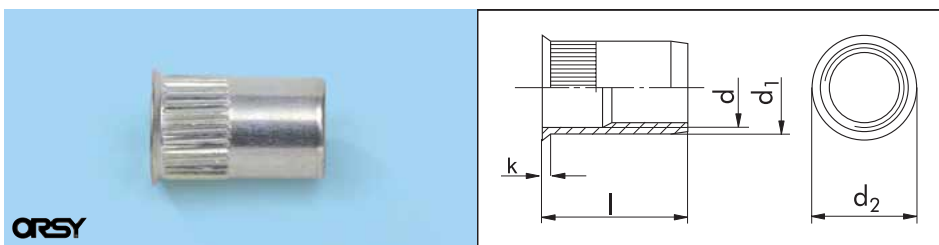

d	Drilled hole dia. in mm	Clamping range in mm	d ₂ in mm	l in mm	d ₁ in mm	Head height k in mm	Art. No.	P. Qty.
M4	7.0	0.5 – 3.0	8.0	10.0	6.9	0.50	0917 740	100
M5	7.0	0.5 – 3.0	8.0	11.5	6.9	0.50	0917 750	
M6	8.0	0.5 – 3.0	9.0	13.0	7.9	0.50	0917 760	
M8	10.0	0.5 – 3.0	11.0	15.5	9.9	0.50	0917 780	50
M10	12.0	0.5 – 3.0	13.0	16.5	11.9	0.50	0917 710 0	


Rivet Nuts

Rivet nuts can be used as riveted and screwed connections. They therefore simultaneously offer safe connections and the ability to easily mount additional components using common screws.

Advantages:

- Installation from one side, therefore also suitable for closed profiles.
- Simple, fast and mostly automatic installation.
- No countersinking of drilled holes necessary.
- Consistently high installation quality.
- Twist-proof connection with load-bearing thread.
- More economy thanks to faster working, safe connections and increased quality.

Assortment

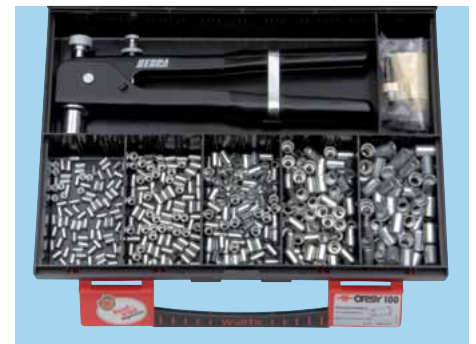

Contents: 500 rivet nuts with small countersunk head of M3 to M8, 5 threaded mandrels M3 to M8, 1 rivet nut pliers Art. No. 0917 1.

Assortment, Art. No. 0964 917 0

Application:

Especially well-suited for achieving high resistance to turning in soft materials, e.g. aluminum, wood, plastic, asbestos, etc.