

For profile	Total L <sub>1</sub> x W <sub>1</sub> x h in mm	Claw L <sub>2</sub> x h in mm	Art. No.	P. Qty.
Kömmerling Eurodur 3 S	150 x 25 x 1.25	48.6 x 9.3	<b>0479 420 1</b>	100
Kömmerling AV (Combidur)		43.2 x 9.6	<b>0479 420 8</b>	
KBE 58 mm		46.9 x 10.0	<b>0479 420 7</b>	
Rehau S 729, S 730, S 796 / Kömmerling 88+ / Trocal 88+		40.1 x 8.8	<b>0479 420 3</b>	
Schüco CT 70		37.0 x 10.0	<b>0479 420 002</b>	
Veka 58 mm		29.6 x 9.4	<b>0479 420 4</b>	
Brüggmann Frisoplast Series 81		43.3 x 12.0	<b>0479 420 9</b>	
Roplasto 6001, Trocal Series 900		40.0 x 9.0	<b>0479 420 11</b>	
Veka 70 mm, Alphaline		41.9 x 9.0	<b>0479 420 15</b>	
Thyssen 60 mm		53.0 x 8.4	<b>0479 420 16</b>	
Salamander 2D/3D/MD/ID		27.3 x 10.4	<b>0479 420 18</b>	
Aluplast Ideal Series 2000 to 8000		35.8 x 10.0	<b>0479 420 19</b>	
Plus Plan 3K System AD		40.8 x 9.0	<b>0479 420 20</b>	
Dimex System Spezial & Super, Kömmerling EuroFutur		43.5 x 10.0	<b>0479 420 21</b>	
Plastmo Index		38.0 x 9.4	<b>0479 420 22</b>	
Dimex Contour 7.0, 8.0		45.3 x 9.8	<b>0479 420 23</b>	
Schüco Schnicks, KBE 58 mm, Schüco Corona AS WITHOUT seal		53.2 x 8.6	<b>0479 420 24</b>	
Brüggmann AD, HP102, HP104		23.0 x 8.3	<b>0479 420 25</b>	
Gealan S7000, Gealan S8000		43.2 x 8.0	<b>0479 420 26</b>	
Kömmerling Eurodur 3 S		200 x 25 x 1.25	48.6 x 9.3	
Schuco CT 70	37.0 x 10.0		<b>0479 520 2</b>	
Rehau S 729, S 730, S 796 / Kömmerling 88+ / Trocal 88+	40.1 x 8.8		<b>0479 520 3</b>	
Veka 58 mm	29.6 x 9.4		<b>0479 520 4</b>	
Gealan S3000 / S6000	31.5 x 10.0		<b>0479 520 6</b>	
Osmo 58 / Sarne 58 / Unilux K-Eurodur MPF 13S / Combidur WF				
Brüggmann AD, HP 102, HP 104	23.0 x 8.3		<b>0479 520 9</b>	
Veka 70 mm, Alphaline	41.9 x 9.0		<b>0479 520 15</b>	
Kömmerling Euro Futur / Dimex Spezial Super	43.5 x 10.0		<b>0479 520 17</b>	
Rehau Basic-, Brillant-, Novo-, Thermodesign	40.6 x 8.8		<b>0479 520 20</b>	
Gealan S7000, Gealan S8000	43.2 x 8.0		<b>0479 520 21</b>	

## Rotary Anchor

### For plastic windows

- Nail holes: 4.5 mm dia.
- **Anchor holes: 8.5 mm dia.**
- Material: galvanized steel plate

#### Your advantage:

- Fast, simple installation of plastic windows in masonry.
- Rotary anchors are capable of excellently absorbing the thermal length changes of the frame materials.




#### Additional article:

Mounting materials:

- Zebra Nail Anchor  
Art. No. 0906 318 60
- Steel Nail  
Art. No. 0478 35 ...
- Amo III Type 3  
Art. No. 0234 330 ...

Drilling:

- Carbide Drill Bit  
Art. No. 0641 ...

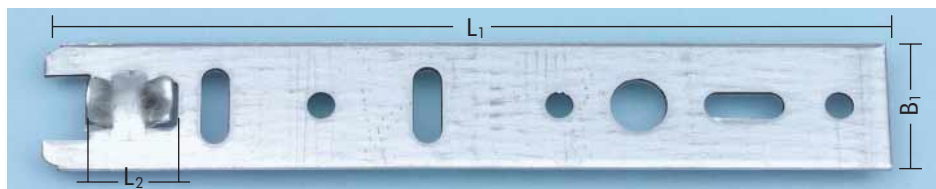

For profile	Total L <sub>1</sub> x W <sub>1</sub> x h in mm	Claw L <sub>2</sub> x h in mm	Art. No.	P. Qty.
Schüco Royal, Bug, Heroal, Wicona	160 x 25 x 2.0	15.0 x 5.5	<b>0479 555 001</b>	100
Alipplast, RC51a, RC65		17.0 x 6.0	<b>0479 555 002</b>	
Schüco Royal, Rehau, Bug, Heroal, Wicona		15.0 x 5.6	<b>0479 620 2</b>	
Rehau S 729, Rehau S 730, Rehau S 796, Schüco CT 70		40.8 x 6.5	<b>0479 620 3</b>	
KBE 58 mm, Tryba T62, Thyssen 60 mm		32.2 x 6.3	<b>0479 620 4</b>	
Dimex System Komfort, Aluplast Ideal 2000 to 8000		37.5 x 6.2	<b>0479 620 6</b>	
Profex, Salamander Design 2D, 3D, MD, ID		28.0 x 7.0	<b>0479 620 7</b>	
Thyssen Prestige 76 mm		200 x 25 x 2.0	47.0 x 5.4	

## Rotary Anchor

### For aluminum and plastic windows

- Anchor holes: 5.2 mm dia.  
8.5 mm dia.  
10.5 mm dia.
- Material: galvanized steel plate.

#### Your advantage:

- Fast, simple installation of aluminum and plastic windows in masonry.