


Lock washer

DIN 127, steel, mechanically galvanised (MZN)

Material	Spring steel
Surface	Zinc plated
RoHS-compliant	Yes
Form	B

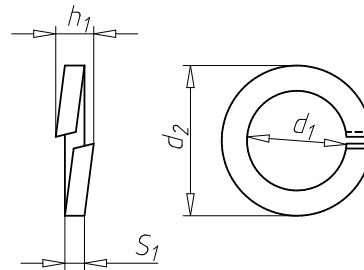

Suitable for screw thread	Internal diameter (d ₁)	Outer diameter (d ₂)	Height (h ₁)	Thickness (s ₁)	Art. no.	P. Qty.
M2	2.1 mm	4.4 mm	1.2 mm	0.5 mm	0441 2	1000
M2.5	2.6 mm	5.1 mm	1.2 mm	0.6 mm	0441 25	5000
M3	3.1 mm	6.2 mm	1.6 mm	0.8 mm	0441 3	1000 /10000
M4	4.1 mm	7.6 mm	1.8 mm	0.9 mm	0441 4	500/1000 /10000
M5	5.1 mm	9.2 mm	2.4 mm	1.2 mm	0441 5	100/500 /1000 /10000
M6	6.1 mm	11.8 mm	3.2 mm	1.6 mm	0441 6	100 /250/500 /1000 /5000
M7	7.1 mm	12.8 mm	3.2 mm	1.6 mm	0441 7	100/2500
M8	8.1 mm	14.8 mm	4 mm	2 mm	0441 8	100 /250/500 /1000
M10	10.2 mm	18.1 mm	4.4 mm	2.2 mm	0441 10	100/500 /1000 /2000
M12	12.2 mm	21.1 mm	5 mm	2.5 mm	0441 12	100/500 /1000
M14	14.2 mm	24.1 mm	6 mm	3 mm	0441 14	100/500
M16	16.2 mm	27.4 mm	7 mm	3.5 mm	0441 16	100/500
M18	18.2 mm	29.4 mm	7 mm	3.5 mm	0441 18	100/250

Suitable for screw thread	Internal diameter (d ₁)	Outer diameter (d ₂)	Height (h ₁)	Thickness (s ₁)	Art. no.	P. Qty.
M20	20.2 mm	33.6 mm	8 mm	4 mm	0441 20	50/100 /250
M22	22.5 mm	35.9 mm	8 mm	4 mm	0441 22	50/100 /250
M24	24.5 mm	40 mm	10 mm	5 mm	0441 24	25/100
M27	27.5 mm	43 mm	10 mm	5 mm	0441 27	100
M30	30.5 mm	48.2 mm	12 mm	6 mm	0441 30	25
M33	33.5 mm	55.2 mm	12 mm	6 mm	0441 33	25
M36	36.5 mm	58.2 mm	12 mm	6 mm	0441 36	25
M48	49 mm	75 mm	14 mm	7 mm	0441 48	10
M52	53 mm	83 mm	16 mm	8 mm	0441 52	1
M64	65 mm	95 mm	16 mm	8 mm	0441 64	5

Can be stored in ORSY system

Notice

Only suitable for screws of strength class ≤ 5.8